

BAUER Worm geared motor Series BS



Three phase worm geared motors for driving machines and equipment of all types.

Danfoss Bauer supplies modern drive solutions for all industry sectors in which material must be moved. The customer benefit lies in the robustness and durability of our products. The simple and cost effective installation, the minor service necessity and the high efficiency reduce the costs throughout the whole life of the drive. The Danfoss-Service is at your disposal world-wide. Bauer-geared motors and VLT® Frequency Converters make drive solutions possible in the power range 0,06 to 75kW.

Proximity to the customer, both geographical and psychological, is an important pre-requisite for good co-operation. Our highly qualified advisors, technicians and fitters are working for you round the world. They speak your language – literally.

Standards

CE-Mark.

Motors according to EN 60034.

Gearbox

Torque 25 ... 1.000 Nm.

Output Speeds 0,2 ... 300 min⁻¹.

versatile installation possibilities.

Completely enclosed, sealed against dust and water spray.

Lubrication change first after 15000 hrs.

Low noise gearing.

Motors

Power 0,03 ... 5,5kW.

Mains connection 110 ... 690V, 50/60Hz.

Enclosure IP65 (Standard), IP66 (Optional).

Additional features Connection with Plug connectors.

With integrated inverter up to 5,5kW.

Brakes


Enclosure IP65 (Standard).

Brakes manufactured in-house.

Maintenance friendly design.

General

Corrosion protection COR01, COR02, COR03.

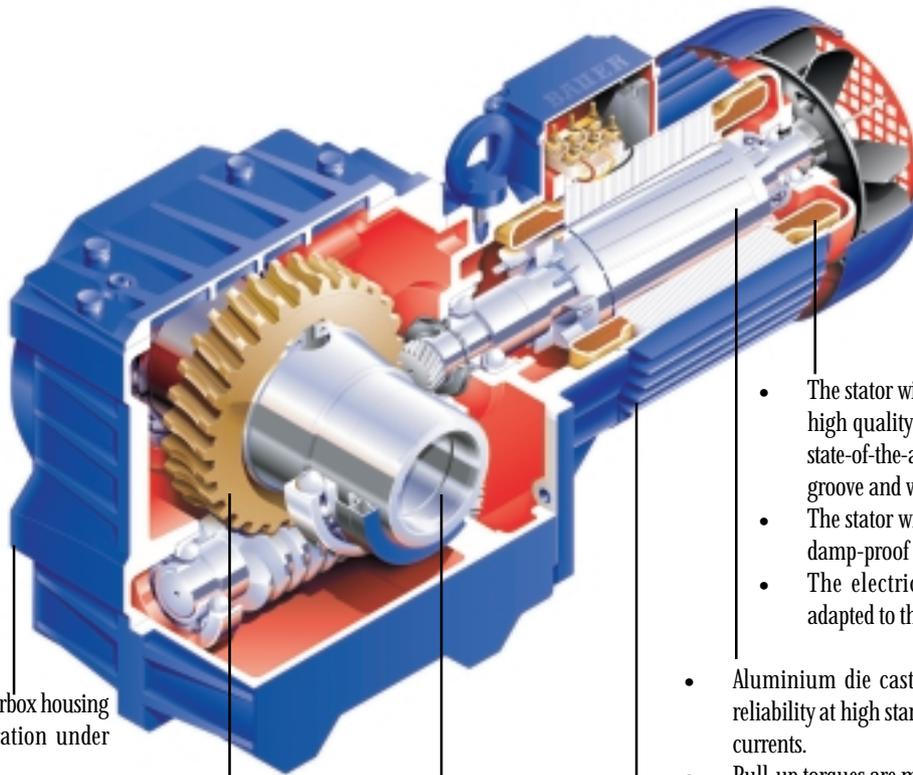

- State-of-the-art gearbox housing designed for operation under harsh conditions.
- Compact closed housing is ideal for preventing lubricant loss and dirt build-up.
- High tensile cast housing.
- Housing with no vibrations, noise absorbent and resistant against chemical effects.
- The housing is machined in a single clamping process.

- Gear wheels made of high tensile and case hardened steel.
- Highly wear resistant through flank hardness of 60-62 HRC.
- impervious to shock.
- Tooth flanks shaved, hobbled or ground.
- Strong, non-flexible pinion shafts and bearings guarantee an exact tooth meshing.
- Worm wheels made of high quality, wear resistant bronze.

- The stator winding is manufactured from high quality enamelled copper wire with state-of-the-art three layer insulation in the groove and winding head.
- The stator winding is impregnated with a damp-proof and drip-free resin.
- The electrical design of the motor is adapted to the gearbox.

- Aluminium die cast cage rotor ensures a high reliability at high starting torques and low starting currents.
- Pull-up torques are mostly avoided.

- Stator housing with jacket and cooling fins are manufactured in one casting and ensure efficient heat dissipation.
- Motor housing, bearing covers and terminal boxes made of corrosion resistant aluminium die casting.
- Stator housing also available in cast iron.
- Spacious terminal box also completely sealed against dust and water spray.
- A large measure on safety through sturdy cable lugs on the winding ends.
- Handy terminals allow easy connection

- Series BS as standard in 2-stage design, sizes BS02 and BS03 are 1-stage.
- Higher ratios available through attachment of a purpose built pre-stage or pre-connected gearbox.
- A variety of possible installation methods - foot- or flange with single or double output shaft, shaft mounting with hollow shaft in keyed or shrink disk version with torque arm – make this right angle gearbox an ideal space saving drive element.
- An economical solution for small torques and very small speeds.

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



Danfoss Drives A/S

DK-6300 Graasten
Denmark
Telephone: +45 74 88 22 22
Telefax: +45 74 65 25 80
www.danfossdrives.com