


11.2 Selection tables, shaft-mounted geared motors

Key to abbreviations

P	Rated output
n_2	Rated speed of the output shaft
i	Gear reduction ratio
M_2	Rated torque at the output shaft
f_B	Bauer service factor
F_{RN}	Maximum permissible radial force with normal bearings
F_{RV}	Maximum permissible radial force with reinforced bearings in each case with standard solid shaft (Code -.1 und -.2)

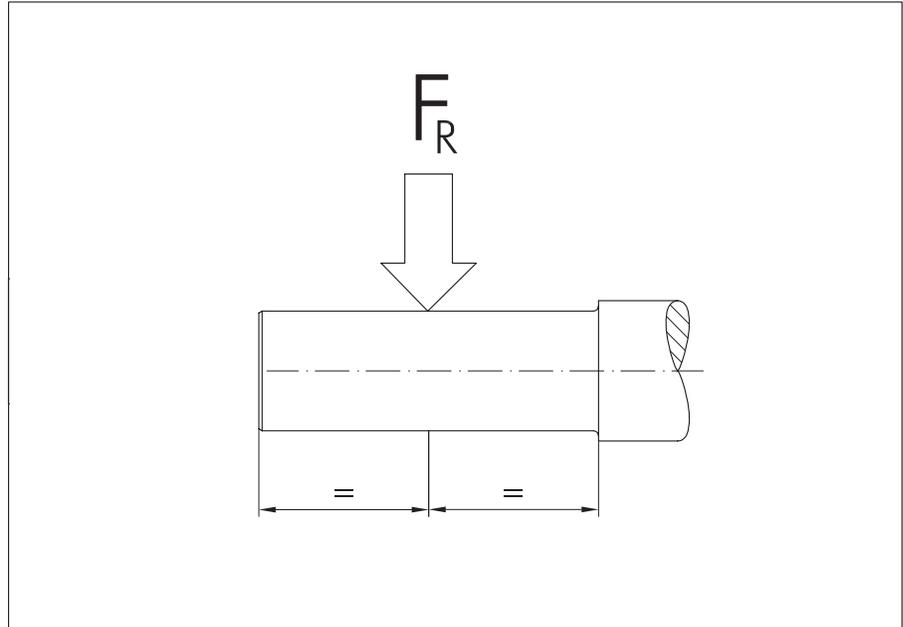

Use the selection tables to determine the size of geared motor required. The codes clearly define the type of gear unit and output shaft (see dimensional drawing 11.3).

The torques marked (*) are maximum permissible torques for service factor $f_B=1,0$.


The drives marked with (#) are available as from November 2003.

Motor power overload protection

Motor-power ratings, particularly in conjunction with four-stage and multi-stage gear units, are more than ample in some instances. Consequently, and in much the same way as with low-power motors, rated current is not a measure of gear loading and cannot be used to protect the gear unit against overloading. It is advisable to provide gears at risk from excessive load or blockage with a protective mechanism (e. g., sliding clutch, sliding hub, shear pin or an alternative).



P = 0.03 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
9.0	31.5	7.6	151.2	BF10Z-../D04LA4	21	6400	-	11	26	9.2
8.2	34.5	7.0	166.2	"	"	6400	-	9.8	29	8.3
7.5	38	6.3	180.1	"	"	6400	-	9.0	31.5	7.6
6.9	41.5	5.8	198.0	"	"	6400	-	8.2	34.5	7.0
6.3	45	5.3	214.5	"	"	6400	-	7.6	37.5	6.4
5.8	49	4.9	235.8	"	"	6400	-	6.9	41.5	5.8
5.3	54	4.4	257.4	"	"	6400	-	6.3	45	5.3
4.8	59	4.1	283.1	"	"	6400	-	5.8	49	4.9
4.2	68	3.5	324.3	"	"	6400	-	5.0	57	4.2
3.8	75	3.2	356.6	"	"	6400	-	4.6	62	3.9
3.6	79	3.0	380.2	"	"	6400	-	4.3	66	3.6
3.3	86	2.8	418.0	"	"	6400	-	3.9	73	3.3
2.9	98	2.4	469.5	"	"	6400	-	3.5	81	3.0
2.7	106	2.3	516.3	"	"	6400	-	3.2	89	2.7
2.6	110	2.2	539.1	"	"	6400	-	3.1	92	2.6
2.3	124	1.95	592.8	"	"	6400	-	2.8	102	2.4
1.8	97	2.7	768.2	BF10G06-../D04LA4	25	6400	-	2.2	68	3.8
1.6	110	2.4	845.1	"	"	6400	-	2.0	75	3.5
1.4	130	2.0	994.0	"	"	6400	-	1.7	94	2.8
1.2	159	1.65	1190	"	"	6400	-	1.4	125	2.1
0.95	210	1.25	1452	"	"	6400	-	1.2	150	1.75
0.8	260*	1.0	1744	"	"	6400	-	0.95	260*	1.0
0.65	260*	1.0	2096	"	"	6400	-	0.8	260*	1.0
0.55	260*	1.0	2467	"	"	6400	-	0.7	260*	1.0
0.46	260*	1.0	2952	"	"	6400	-	0.55	260*	1.0
0.35	260*	1.0	3942	"	"	6400	-	0.42	260*	1.0
0.3	260*	1.0	4569	"	"	6400	-	0.36	260*	1.0
0.24	260*	1.0	5709	"	"	6400	-	0.29	260*	1.0
0.21	260*	1.0	6550	"	"	6400	-	0.25	260*	1.0
0.16	260*	1.0	8681	"	"	6400	-	0.19	260*	1.0
0.15	260*	1.0	9471	"	"	6400	-	0.18	260*	1.0
1.2	162	2.8	1140	BF20G06-../D04LA4	31	7900	-	1.5	114	4.0
1.0	200	2.3	1392	"	"	7900	-	1.2	154	3.0
0.8	265	1.75	1764	"	"	7900	-	0.95	210	2.2
0.65	345	1.35	2192	"	"	7900	-	0.75	285	1.6
0.55	410	1.1	2579	"	"	7900	-	0.65	330	1.4
0.48	460*	1.0	2829	"	"	7900	-	0.6	460*	1.0
0.36	460*	1.0	3778	"	"	7900	-	0.43	460*	1.0
0.31	460*	1.0	4379	"	"	7900	-	0.37	460*	1.0
0.25	460*	1.0	5471	"	"	7900	-	0.3	460*	1.0
0.2	460*	1.0	6847	"	"	7900	-	0.24	460*	1.0
0.17	460*	1.0	8320	"	"	7900	-	0.2	460*	1.0
0.15	460*	1.0	9077	"	"	7900	-	0.18	460*	1.0
1.0	200	3.2	1404	BF30G06-../D04LA4	41	7400	-	1.2	153	4.1
0.85	245	2.6	1686	"	"	7400	-	1.0	196	3.2
0.7	315	2.0	2026	"	"	7400	-	0.8	260	2.4
0.6	370	1.7	2386	"	"	7400	-	0.7	305	2.1
0.48	485	1.3	2854	"	"	7400	-	0.6	365	1.75
0.39	610	1.05	3493	"	"	7400	-	0.47	485	1.3
0.31	630*	1.0	4417	"	"	7400	-	0.37	630*	1.0
0.27	630*	1.0	5060	"	"	7400	-	0.33	630*	1.0
0.22	630*	1.0	6333	"	"	7400	-	0.26	630*	1.0
0.19	630*	1.0	7206	"	"	7400	-	0.23	630*	1.0
0.15	630*	1.0	9157	"	"	7400	-	0.18	630*	1.0

P = 0.04 kW

9.0	42	5.7	151.2	BF10Z-../D04LA4	21	6400	-	11	34.5	7.0
8.2	46.5	5.2	166.2	"	"	6400	-	9.8	38.5	6.2
7.5	50	4.8	180.1	"	"	6400	-	9.0	42	5.7
6.9	55	4.4	198.0	"	"	6400	-	8.2	46.5	5.2
6.3	60	4.0	214.5	"	"	6400	-	7.6	50	4.8
5.8	65	3.7	235.8	"	"	6400	-	6.9	55	4.4
5.3	72	3.3	257.4	"	"	6400	-	6.3	60	4.0

P = 0.04 kW



Danfoss


50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
4.8	79	3.0	283.1	BF10Z-../D04LA4	21	6400	-	5.8	65	3.7
4.2	90	2.7	324.3	"	"	6400	-	5.0	76	3.2
3.8	100	2.4	356.6	"	"	6400	-	4.6	83	2.9
3.6	106	2.3	380.2	"	"	6400	-	4.3	88	2.7
3.3	115	2.1	418.0	"	"	6400	-	3.9	97	2.5
2.9	131	1.85	469.5	"	"	6400	-	3.5	109	2.2
2.7	141	1.7	516.3	"	"	6400	-	3.2	119	2.0
2.6	146	1.65	539.1	"	"	6400	-	3.1	123	1.95
2.3	166	1.45	592.8	"	"	6400	-	2.8	136	1.75
2.1	119	2.2	643.8	BF10G06-../D04LA4	25	6400	-	2.6	84	3.1
1.8	150	1.75	768.2	"	"	6400	-	2.2	111	2.3
1.6	170	1.55	845.1	"	"	6400	-	2.0	122	2.1
1.4	199	1.3	994.0	"	"	6400	-	1.7	150	1.75
1.2	235	1.1	1190	"	"	6400	-	1.4	193	1.35
0.95	260*	1.0	1452	"	"	6400	-	1.2	260*	1.0
3.0	127	3.3	460.0	BF20Z-../D04LA4	28	7900	-	3.6	106	4.0
1.9	141	3.3	736.1	BF20G06-../D04LA4	31	7900	-	2.3	106	4.3
1.7	159	2.9	810.0	"	"	7900	-	2.0	125	3.7
1.5	183	2.5	952.7	"	"	7900	-	1.8	141	3.3
1.2	240	1.9	1140	"	"	7900	-	1.5	178	2.6
1.0	295	1.55	1392	"	"	7900	-	1.2	230	2.0
0.8	385	1.2	1764	"	"	7900	-	0.95	310	1.5
0.65	460*	1.0	2192	"	"	7900	-	0.75	460*	1.0
1.2	240	2.6	1150	BF30G06-../D04LA4	41	7400	-	1.5	177	3.6
1.0	295	2.1	1404	"	"	7400	-	1.2	230	2.7
0.85	355	1.75	1686	"	"	7400	-	1.0	290	2.2
0.7	450	1.4	2026	"	"	7400	-	0.8	380	1.65
0.6	530	1.2	2386	"	"	7400	-	0.7	440	1.45
0.48	630*	1.0	2854	"	"	7400	-	0.6	630*	1.0

P = 0.06 kW

51	11.2	8.5	26.76	BF06-../D06LA4 #	12	3000	-	61	9.3	10
43	13.3	7.1	31.50	"	"	3200	-	52	11	8.6
36	15.9	6.0	37.69	"	"	3500	-	43	13.3	7.1
29.5	19.4	4.9	46.14	"	"	3800	-	35.5	16.1	5.9
23.5	24	4.0	58.33	"	"	4000	-	28	20	4.8
20.5	27.5	3.5	66.82	"	"	4300	-	24.5	23	4.1
16.5	34.5	2.8	83.61	"	"	4600	-	19.5	29	3.3
14.5	39.5	2.4	95.16	"	"	5000	-	17.5	32.5	2.9
12.5	45.5	1.8	110.8	"	"	5000	-	15	38	2.1
7.5	76	3.2	180.1	BF10Z-../D06LA4	25	6400	-	9.0	63	3.8
6.9	83	2.9	198.0	"	"	6400	-	8.2	69	3.5
6.3	90	2.7	214.5	"	"	6400	-	7.6	75	3.2
5.8	98	2.4	235.8	"	"	6400	-	6.9	83	2.9
5.3	108	2.2	257.4	"	"	6400	-	6.3	90	2.7
4.8	119	2.0	283.1	"	"	6400	-	5.8	98	2.4
4.2	136	1.75	324.3	"	"	6400	-	5.0	114	2.1
3.8	150	1.6	356.6	"	"	6400	-	4.6	124	1.95
3.6	159	1.5	380.2	"	"	6400	-	4.3	133	1.8
3.3	173	1.4	418.0	"	"	6400	-	3.9	146	1.65
2.9	197	1.2	469.5	"	"	6400	-	3.5	163	1.45
2.7	210	1.15	516.3	"	"	6400	-	3.2	179	1.35
2.6	220	1.1	539.1	"	"	6400	-	3.1	184	1.3
2.3	245	0.98	592.8	"	"	6400	-	2.8	200	1.2
2.1	210	1.25	643.8	BF10G06-../D06LA4	28	6400	-	2.6	157	1.65
1.8	255	1.0	768.2	"	"	6400	-	2.2	198	1.3
1.6	290	0.9	845.1	"	"	6400	-	2.0	215	1.2
4.2	136	3.1	325.2	BF20Z-../D06LA4	31	7900	-	5.0	114	3.7
4.0	143	2.9	339.1	"	"	7900	-	4.8	119	3.5
3.7	154	2.7	373.1	"	"	7900	-	4.4	130	3.2



P = 0.06 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
3.3	173	2.4	418.1	BF20Z-../D06LA4	31	7900	-	3.9	146	2.9
3.0	191	2.2	460.0	"	"	7900	-	3.6	159	2.6
2.7	157	2.9	513.7	BF20G06-../D06LA4	34	7900	-	3.2	124	3.7
2.2	200	2.3	617.0	"	"	7900	-	2.7	152	3.0
1.9	240	1.9	736.1	"	"	7900	-	2.3	189	2.4
1.7	270	1.7	810.0	"	"	7900	-	2.0	220	2.1
1.5	310	1.5	952.7	"	"	7900	-	1.8	245	1.9
1.2	400	1.15	1140	"	"	7900	-	1.5	305	1.5
1.0	485	0.95	1392	"	"	7900	-	1.2	390	1.2
0.9	460*	1.0	1533	"	"	7900	-	1.1	460*	1.0
3.3	173	3.3	412.6	BF30Z-../D06LA4	42	7400	-	4.0	143	4.0
3.0	191	3.0	463.3	"	"	7400	-	3.5	163	3.5
2.7	210	2.7	509.6	"	"	7400	-	3.2	179	3.2
2.6	220	2.6	537.0	"	"	7400	-	3.1	184	3.1
2.3	245	2.3	590.7	"	"	7400	-	2.8	200	2.9
2.2	200	3.2	622.4	BF30G06-../D06LA4	45	7400	-	2.7	151	4.2
1.7	270	2.3	817.1	"	"	7400	-	2.0	220	2.9
1.5	310	2.0	961.1	"	"	7400	-	1.7	265	2.4
1.2	400	1.6	1150	"	"	7400	-	1.5	305	2.1
1.0	485	1.3	1404	"	"	7400	-	1.2	390	1.6
0.85	580	1.1	1686	"	"	7400	-	1.0	480	1.3
0.7	630*	1.0	2026	"	"	7400	-	0.8	630*	1.0
0.95	340	2.9	1484	BF40G10-../D06LA4	58	10600	-	1.1	255	3.9
0.75	460	2.2	1810	"	"	10600	-	0.9	335	3.0
0.55	710	1.4	2536	"	"	10600	-	0.65	550	1.8
0.49	840	1.2	2810	"	"	10600	-	0.6	620	1.6
0.41	1000*	1.0	3346	"	"	10600	-	0.49	1000*	1.0
0.7	520	2.7	2059	BF50G10-../D06LA4	87	13600	-	0.8	415	3.4
0.6	640	2.2	2360	"	"	13600	-	0.7	510	2.7
0.49	860	1.65	2810	"	"	13600	-	0.6	640	2.2
0.41	1090	1.3	3348	"	"	13600	-	0.49	860	1.65
0.34	1370	1.0	4019	"	"	13600	-	0.41	1090	1.3
0.42	860	2.9	3237	BF60G20-../D06LA4	134	15300	43300	0.55	530	4.7
0.35	1130	2.2	3883	"	"	15300	43300	0.42	860	2.9
0.3	1400	1.8	4646	"	"	15300	43300	0.35	1130	2.2
0.26	1700	1.45	5241	"	"	15300	43300	0.31	1340	1.85
0.23	1980	1.25	6014	"	"	15300	43300	0.27	1620	1.55
0.17	2500*	1.0	8235	"	"	15300	43300	0.2	2500*	1.0
0.24	1890	3.0	5691	BF70G20-../D06LA4	212	16100	47700	0.29	1480	3.9
0.21	2200	2.6	6530	"	"	16100	47700	0.25	1800	3.2
0.17	2850	2.0	8052	"	"	16100	47700	0.21	2200	2.6

P = 0.09 kW

112	7.6	9.9	12.07	BF06-../D06LA4 #	12	2000	-	135	6.3	12
96	8.9	9.6	14.21	"	"	2100	-	115	7.4	11
80	10.7	8.9	16.99	"	"	2500	-	96	8.9	11
67	12.8	7.4	20.42	"	"	2700	-	80	10.7	8.9
51	16.8	5.7	26.76	"	"	3000	-	61	14	6.8
43	19.9	4.8	31.50	"	"	3200	-	52	16.5	5.8
36	23.5	4.0	37.69	"	"	3500	-	43	19.9	4.8
29.5	29	3.3	46.14	"	"	3800	-	35.5	24	4.0
23.5	36.5	2.6	58.33	"	"	4000	-	28	30.5	3.1
20.5	41.5	2.3	66.82	"	"	4300	-	24.5	35	2.7
16.5	52	1.85	83.61	"	"	4600	-	19.5	44	2.2
14.5	59	1.6	95.16	"	"	5000	-	17.5	49	1.95
12.5	68	1.2	110.8	"	"	5000	-	15	57	1.4
11	78	3.1	123.5	BF10-../D06LA4	23	6100	-	13.5	63	3.8
10.5	81	3.0	128.9	"	"	6200	-	13	66	3.6


P = 0.09 kW



Danfoss

50 Hz			i	Type	m	F _{RN}	F _{RV}	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
9.6	89	2.7	141.8	BF10-../D06LA4	23	6400	-	11.5	74	3.2
9.0	95	2.5	151.2	BF10Z-../D06LA4	25	6400	-	11	78	3.1
8.2	104	2.3	166.2	"	"	6400	-	9.8	87	2.8
7.5	114	2.1	180.1	"	"	6400	-	9.0	95	2.5
6.9	124	1.95	198.0	"	"	6400	-	8.2	104	2.3
6.3	136	1.75	214.5	"	"	6400	-	7.6	113	2.1
5.8	148	1.6	235.8	"	"	6400	-	6.9	124	1.95
5.3	162	1.5	257.4	"	"	6400	-	6.3	136	1.75
4.8	179	1.35	283.1	"	"	6400	-	5.8	148	1.6
4.2	200	1.2	324.3	"	"	6400	-	5.0	171	1.4
3.8	225	1.05	356.6	"	"	6400	-	4.6	186	1.3
3.6	235	1.0	380.2	"	"	6400	-	4.3	199	1.2
3.3	260	0.92	418.0	"	"	6400	-	3.9	220	1.1
2.9	295	0.81	469.5	"	"	6400	-	3.5	245	0.98
2.6	270	0.96	536.0	BF10G06-../D06LA4	28	6400	-	3.1	220	1.2
6.3	136	3.1	216.9	BF20Z-../D06LA4	31	7900	-	7.5	114	3.7
5.8	148	2.8	235.9	"	"	7900	-	6.9	124	3.4
5.3	162	2.6	259.6	"	"	7900	-	6.3	136	3.1
4.6	186	2.3	295.5	"	"	7900	-	5.5	156	2.7
4.2	200	2.1	325.2	"	"	7900	-	5.0	171	2.5
4.0	210	2.0	339.1	"	"	7900	-	4.8	179	2.3
3.7	230	1.85	373.1	"	"	7900	-	4.4	195	2.2
3.3	260	1.6	418.1	"	"	7900	-	3.9	220	1.9
3.0	285	1.45	460.0	"	"	7900	-	3.6	235	1.8
2.7	260	1.75	513.7	BF20G06-../D06LA4	34	7900	-	3.2	210	2.2
2.2	330	1.4	617.0	"	"	7900	-	2.7	255	1.8
1.9	390	1.2	736.1	"	"	7900	-	2.3	310	1.5
1.7	440	1.05	810.0	"	"	7900	-	2.0	360	1.3
1.5	500	0.92	952.7	"	"	7900	-	1.8	405	1.15
4.7	182	3.2	289.8	BF30Z-../D06LA4	42	7400	-	5.6	153	3.8
4.4	195	2.9	310.7	"	"	7400	-	5.3	162	3.5
4.0	210	2.7	341.8	"	"	7400	-	4.8	179	3.2
3.6	235	2.4	375.1	"	"	7400	-	4.4	195	2.9
3.3	260	2.2	412.6	"	"	7400	-	4.0	210	2.7
3.0	285	2.0	463.3	"	"	7400	-	3.5	245	2.3
2.7	315	1.85	509.6	"	"	7400	-	3.2	265	2.2
2.6	330	1.75	537.0	"	"	7400	-	3.1	275	2.1
2.3	370	1.55	590.7	"	"	7400	-	2.8	305	1.9
2.2	330	1.9	622.4	BF30G06-../D06LA4	45	7400	-	2.7	255	2.5
1.7	435	1.45	817.1	"	"	7400	-	2.0	360	1.75
1.5	500	1.25	961.1	"	"	7400	-	1.7	430	1.45
1.2	630	1.0	1150	"	"	7400	-	1.5	495	1.25
1.0	770	0.82	1404	"	"	7400	-	1.2	630	1.0
3.0	285	3.2	459.1	BF40Z-../D06LA4	53	10600	-	3.6	235	3.8
2.7	315	2.9	514.6	"	"	10600	-	3.2	265	3.4
2.4	355	2.5	566.1	"	"	10600	-	2.9	295	3.1
1.5	350	2.9	928.9	BF40G10-../D06LA4	58	10600	-	1.8	255	3.9
1.3	420	2.4	1106	"	"	10600	-	1.5	330	3.0
1.1	540	1.85	1324	"	"	10600	-	1.3	425	2.4
0.95	640	1.55	1484	"	"	10600	-	1.1	510	1.95
0.75	840	1.2	1810	"	"	10600	-	0.9	650	1.55
0.55	1000*	1.0	2536	"	"	10600	-	0.65	1000*	1.0
1.2	500	2.8	1203	BF50G10-../D06LA4	87	13600	-	1.4	400	3.5
1.0	620	2.3	1359	"	"	13600	-	1.2	475	2.9
0.85	730	1.9	1684	"	"	13600	-	1.0	570	2.5
0.7	920	1.5	2059	"	"	13600	-	0.8	770	1.8
0.6	1120	1.25	2360	"	"	13600	-	0.7	920	1.5
0.49	1400*	1.0	2810	"	"	13600	-	0.6	1400*	1.0
0.7	780	3.2	1955	BF60G20-../D06LA4	134	15300	43300	0.85	560	4.5
0.49	1250	2.0	2781	"	"	15300	43300	0.6	930	2.7
0.42	1540	1.6	3237	"	"	15300	43300	0.55	1060	2.4

P = 0.09 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
0.35	1950	1.3	3883	BF60G20-../D06LA4	134	15300	43300	0.42	1540	1.6
0.3	2350	1.05	4646	"	"	15300	43300	0.35	1950	1.3
0.26	2500*	1.0	5241	"	"	15300	43300	0.31	2500*	1.0
0.34	2000	2.9	4090	BF70G20-../D06LA4	212	16100	47700	0.4	1650	3.5
0.3	2350	2.4	4542	"	"	16100	47700	0.36	1890	3.0
0.24	3050	1.85	5691	"	"	16100	47700	0.29	2450	2.3
0.21	3600	1.6	6530	"	"	16100	47700	0.25	2900	1.95
0.17	4550	1.25	8052	"	"	16100	47700	0.21	3600	1.6

P = 0.12 kW

147	7.7	9.1	9.21	BF06-../D06LA4 #	12	1900	-	176	6.5	11
112	10.2	7.4	12.07	"	"	2000	-	135	8.4	8.9
96	11.9	7.1	14.21	"	"	2100	-	115	9.9	8.6
80	14.3	6.6	16.99	"	"	2500	-	96	11.9	8.0
67	17.1	5.6	20.42	"	"	2700	-	80	14.3	6.6
51	22	4.3	26.76	"	"	3000	-	61	18.7	5.1
43	26.5	3.6	31.50	"	"	3200	-	52	22	4.3
36	31.5	3.0	37.69	"	"	3500	-	43	26.5	3.6
29.5	38.5	2.5	46.14	"	"	3800	-	35.5	32	3.0
23.5	48.5	1.95	58.33	"	"	4000	-	28	40.5	2.3
20.5	55	1.75	66.82	"	"	4300	-	24.5	46.5	2.0
16.5	69	1.4	83.61	"	"	4600	-	19.5	58	1.65
14.5	79	1.2	95.16	"	"	5000	-	17.5	65	1.45
12.5	91	0.89	110.8	"	"	5000	-	15	76	1.05
15	76	3.2	90.91	BF10-../D06LA4	23	5400	-	18	63	3.8
14	81	3.0	99.97	"	"	5600	-	16.5	69	3.5
12.5	91	2.6	112.3	"	"	5900	-	14.5	79	3.0
11	104	2.3	123.5	"	"	6100	-	13.5	84	2.9
10.5	109	2.2	128.9	"	"	6200	-	13	88	2.7
9.6	119	2.0	141.8	"	"	6400	-	11.5	99	2.4
9.0	127	1.9	151.2	BF10Z-../D06LA4	25	6400	-	11	104	2.3
8.2	139	1.75	166.2	"	"	6400	-	9.8	116	2.1
7.5	152	1.6	180.1	"	"	6400	-	9.0	127	1.9
6.9	166	1.45	198.0	"	"	6400	-	8.2	139	1.75
6.3	181	1.35	214.5	"	"	6400	-	7.6	150	1.6
5.8	197	1.2	235.8	"	"	6400	-	6.9	166	1.45
5.3	215	1.1	257.4	"	"	6400	-	6.3	181	1.35
4.8	235	1.0	283.1	"	"	6400	-	5.8	197	1.2
4.2	270	0.89	324.3	"	"	6400	-	5.0	225	1.05
3.8	300	0.8	356.6	"	"	6400	-	4.6	245	0.98
3.6	275	0.95	377.9	BF10G06-../D06LA4	28	6400	-	4.3	225	1.15
3.2	310	0.84	424.5	"	"	6400	-	3.9	245	1.05
8.7	131	3.2	155.4	BF20Z-../D06LA4	31	7900	-	10.5	109	3.9
8.3	138	3.0	164.3	"	"	7900	-	9.9	115	3.7
7.5	152	2.8	180.8	"	"	7900	-	9.0	127	3.3
6.9	166	2.5	197.1	"	"	7900	-	8.3	138	3.0
6.3	181	2.3	216.9	"	"	7900	-	7.5	152	2.8
5.8	197	2.1	235.9	"	"	7900	-	6.9	166	2.5
5.3	215	1.95	259.6	"	"	7900	-	6.3	181	2.3
4.6	245	1.7	295.5	"	"	7900	-	5.5	205	2.0
4.2	270	1.55	325.2	"	"	7900	-	5.0	225	1.85
4.0	285	1.45	339.1	"	"	7900	-	4.8	235	1.8
3.7	305	1.4	373.1	"	"	7900	-	4.4	260	1.6
3.3	345	1.2	418.1	"	"	7900	-	3.9	290	1.45
3.0	380	1.1	460.0	"	"	7900	-	3.6	315	1.35
2.7	370	1.25	513.7	BF20G06-../D06LA4	34	7900	-	3.2	300	1.55
2.2	460	1.0	617.0	"	"	7900	-	2.7	360	1.3
1.9	540	0.85	736.1	"	"	7900	-	2.3	435	1.05
6.1	187	3.1	224.8	BF30Z-../D06LA4	42	7400	-	7.3	156	3.7
5.5	205	2.8	247.3	"	"	7400	-	6.6	173	3.3
5.2	220	2.6	263.5	"	"	7400	-	6.2	184	3.1

P = 0.12 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
4.7	240	2.4	289.8	BF30Z-../D06LA4	42	7400	-	5.6	200	2.9
4.4	260	2.2	310.7	"	"	7400	-	5.3	215	2.7
4.0	285	2.0	341.8	"	"	7400	-	4.8	235	2.4
3.6	315	1.85	375.1	"	"	7400	-	4.4	260	2.2
3.3	345	1.65	412.6	"	"	7400	-	4.0	285	2.0
3.0	380	1.5	463.3	"	"	7400	-	3.5	325	1.75
2.7	420	1.35	509.6	"	"	7400	-	3.2	355	1.6
2.6	440	1.3	537.0	"	"	7400	-	3.1	365	1.6
2.3	495	1.15	590.7	"	"	7400	-	2.8	405	1.4
2.2	460	1.35	622.4	BF30G06-../D06LA4	45	7400	-	2.7	360	1.75
1.7	600	1.05	817.1	"	"	7400	-	2.0	500	1.25
1.5	690	0.91	961.1	"	"	7400	-	1.7	600	1.05
4.2	270	3.3	324.7	BF40Z-../D06LA4	53	10600	-	5.0	225	4.0
3.9	290	3.1	346.8	"	"	10600	-	4.7	240	3.8
3.6	315	2.9	381.5	"	"	10600	-	4.3	265	3.4
3.3	345	2.6	417.3	"	"	10600	-	3.9	290	3.1
3.0	380	2.4	459.1	"	"	10600	-	3.6	315	2.9
2.7	420	2.1	514.6	"	"	10600	-	3.2	355	2.5
2.4	475	1.9	566.1	"	"	10600	-	2.9	395	2.3
2.3	310	3.2	597.3	BF40G10-../D06LA4	58	10600	-	2.8	220	4.5
1.9	395	2.5	731.6	"	"	10600	-	2.3	290	3.4
1.5	540	1.85	928.9	"	"	10600	-	1.8	410	2.4
1.3	640	1.55	1106	"	"	10600	-	1.5	520	1.9
1.1	800	1.25	1324	"	"	10600	-	1.3	640	1.55
0.95	940	1.05	1484	"	"	10600	-	1.1	780	1.3
0.75	1000*	1.0	1810	"	"	10600	-	0.9	1000*	1.0
2.8	405	3.2	496.4	BF50Z-../D06LA4	83	13600	-	3.3	345	3.8
2.5	455	2.9	555.2	"	"	13600	-	3.0	380	3.4
1.6	500	2.8	864.5	BF50G10-../D06LA4	87	13600	-	1.9	395	3.5
1.4	590	2.4	1029	"	"	13600	-	1.6	490	2.9
1.2	740	1.9	1203	"	"	13600	-	1.4	600	2.3
1.0	900	1.55	1359	"	"	13600	-	1.2	710	1.95
0.85	1060	1.3	1684	"	"	13600	-	1.0	860	1.65
0.7	1330	1.05	2059	"	"	13600	-	0.8	1130	1.25
0.6	1400*	1.0	2360	"	"	13600	-	0.7	1400*	1.0
0.95	820	3.0	1494	BF60G20-../D06LA4	134	15300	43300	1.1	660	3.8
0.85	920	2.7	1658	"	"	15300	43300	1.0	720	3.5
0.7	1190	2.1	1955	"	"	15300	43300	0.85	900	2.8
0.49	1830	1.35	2781	"	"	15300	43300	0.6	1400	1.8
0.42	2200	1.15	3237	"	"	15300	43300	0.55	1580	1.6
0.35	2500*	1.0	3883	"	"	15300	43300	0.42	2500*	1.0
0.48	1890	3.0	2849	BF70G20-../D06LA4	212	16100	47700	0.6	1410	4.0
0.4	2350	2.4	3417	"	"	16100	47700	0.48	1890	3.0
0.34	2850	2.0	4090	"	"	16100	47700	0.4	2350	2.4
0.3	3300	1.75	4542	"	"	16100	47700	0.36	2650	2.2
0.24	4250	1.35	5691	"	"	16100	47700	0.29	3450	1.65
0.21	4950	1.15	6530	"	"	16100	47700	0.25	4050	1.4
0.17	5700*	1.0	8052	"	"	16100	47700	0.21	5700*	1.0

P = 0.18 kW

177	9.7	7.0	7.66	BF06-../D06LA4 #	12	1800	-	215	7.9	8.6
147	11.6	6.0	9.21	"	"	1900	-	176	9.7	7.2
112	15.3	4.9	12.07	"	"	2000	-	135	12.7	5.9
96	17.9	4.7	14.21	"	"	2100	-	115	14.9	5.7
80	21	4.5	16.99	"	"	2500	-	96	17.9	5.3
67	25.5	3.7	20.42	"	"	2700	-	80	21	4.5
51	33.5	2.8	26.76	"	"	3000	-	61	28	3.4
43	39.5	2.4	31.50	"	"	3200	-	52	33	2.9
36	47.5	2.0	37.69	"	"	3500	-	43	39.5	2.4
29.5	58	1.65	46.14	"	"	3800	-	35.5	48	2.0
23.5	73	1.3	58.33	"	"	4000	-	28	61	1.55


P = 0.18 kW



Danfoss

50 Hz			i	Type	m	F _{RN}	F _{RV}	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
20.5	83	1.15	66.82	BF06-../D06LA4 #	12	4300	-	24.5	70	1.35
16.5	104	0.91	83.61	"	"	4600	-	19.5	88	1.1
14.5	118	0.81	95.16	"	"	5000	-	17.5	98	0.97
22	78	3.1	61.55	BF10-../D06LA4	23	4700	-	26.5	64	3.8
20	85	2.8	67.69	"	"	4900	-	24	71	3.4
17.5	98	2.4	77.55	"	"	5100	-	21	81	3.0
16	107	2.2	85.27	"	"	5300	-	19	90	2.7
15	114	2.1	90.91	"	"	5400	-	18	95	2.5
14	122	1.95	99.97	"	"	5600	-	16.5	104	2.3
12.5	137	1.75	112.3	"	"	5900	-	14.5	118	2.0
11	156	1.55	123.5	"	"	6100	-	13.5	127	1.9
10.5	163	1.45	128.9	"	"	6200	-	13	132	1.8
9.6	179	1.35	141.8	"	"	6400	-	11.5	149	1.6
9.0	191	1.25	151.2	BF10Z-../D06LA4	25	6400	-	11	156	1.55
8.2	205	1.15	166.2	"	"	6400	-	9.8	175	1.35
7.5	225	1.05	180.1	"	"	6400	-	9.0	191	1.25
6.9	245	0.98	198.0	"	"	6400	-	8.2	205	1.15
6.3	270	0.89	214.5	"	"	6400	-	7.6	225	1.05
5.8	295	0.81	235.8	"	"	6400	-	6.9	245	0.98
13.5	127	3.3	100.2	BF20-../D06LA4	30	7000	-	16.5	104	4.0
12.5	137	3.1	110.2	"	"	7300	-	15	114	3.7
11	156	2.7	123.5	"	"	7600	-	13.5	127	3.3
10	171	2.5	135.9	"	"	7900	-	12	143	2.9
9.6	179	2.3	141.2	BF20Z-../D06LA4	31	7900	-	11.5	149	2.8
8.7	197	2.1	155.4	"	"	7900	-	10.5	163	2.6
8.3	205	2.0	164.3	"	"	7900	-	9.9	173	2.4
7.5	225	1.85	180.8	"	"	7900	-	9.0	191	2.2
6.9	245	1.7	197.1	"	"	7900	-	8.3	205	2.0
6.3	270	1.55	216.9	"	"	7900	-	7.5	225	1.85
5.8	295	1.4	235.9	"	"	7900	-	6.9	245	1.7
5.3	320	1.3	259.6	"	"	7900	-	6.3	270	1.55
4.6	370	1.15	295.5	"	"	7900	-	5.5	310	1.35
4.2	405	1.05	325.2	"	"	7900	-	5.0	340	1.25
4.0	425	0.99	339.1	"	"	7900	-	4.8	355	1.2
3.7	460	0.91	373.1	"	"	7900	-	4.4	390	1.1
3.3	520	0.81	418.1	"	"	7900	-	3.9	440	0.95
9.9	173	3.3	137.1	BF30-../D06LA4	40	7400	-	12	143	4.0
9.0	191	3.0	150.7	BF30Z-../D06LA4	42	7400	-	11	156	3.7
8.2	205	2.8	165.8	"	"	7400	-	9.8	175	3.3
7.7	220	2.6	176.6	"	"	7400	-	9.2	186	3.1
7.0	245	2.3	194.3	"	"	7400	-	8.4	200	2.9
6.1	280	2.1	224.8	"	"	7400	-	7.3	235	2.4
5.5	310	1.85	247.3	"	"	7400	-	6.6	260	2.2
5.2	330	1.75	263.5	"	"	7400	-	6.2	275	2.1
4.7	365	1.6	289.8	"	"	7400	-	5.6	305	1.9
4.4	390	1.45	310.7	"	"	7400	-	5.3	320	1.8
4.0	425	1.35	341.8	"	"	7400	-	4.8	355	1.6
3.6	475	1.2	375.1	"	"	7400	-	4.4	390	1.45
3.3	520	1.1	412.6	"	"	7400	-	4.0	425	1.35
3.0	570	1.0	463.3	"	"	7400	-	3.5	490	1.15
2.7	630	0.91	509.6	"	"	7400	-	3.2	530	1.1
2.6	660	0.87	537.0	"	"	7400	-	3.1	550	1.05
2.2	720	0.88	622.4	BF30G06-../D06LA4	45	7400	-	2.7	570	1.1
6.1	280	3.2	222.4	BF40Z-../D06LA4	53	10600	-	7.3	235	3.8
5.4	315	2.9	253.2	"	"	10600	-	6.4	265	3.4
4.9	350	2.6	278.5	"	"	10600	-	5.9	290	3.1
4.6	370	2.4	295.1	"	"	10600	-	5.5	310	2.9
4.2	405	2.2	324.7	"	"	10600	-	5.0	340	2.6
3.9	440	2.0	346.8	"	"	10600	-	4.7	365	2.5
3.6	475	1.9	381.5	"	"	10600	-	4.3	395	2.3
3.3	520	1.75	417.3	"	"	10600	-	3.9	440	2.0
3.0	570	1.6	459.1	"	"	10600	-	3.6	475	1.9

P = 0.18 kW



Danfoss


50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
2.7	630	1.45	514.6	BF40Z-../D06LA4	53	10600	-	3.2	530	1.7
2.4	710	1.25	566.1	"	"	10600	-	2.9	590	1.55
2.3	560	1.8	597.3	BF40G10-../D06LA4	58	10600	-	2.8	425	2.4
1.9	690	1.45	731.6	"	"	10600	-	2.3	540	1.85
1.5	920	1.1	928.9	"	"	10600	-	1.8	730	1.35
1.3	1080	0.93	1106	"	"	10600	-	1.5	900	1.1
4.3	395	3.3	316.6	BF50Z-../D06LA4	83	13600	-	5.2	330	3.9
3.9	440	3.0	354.0	"	"	13600	-	4.6	370	3.5
3.5	490	2.7	392.8	"	"	13600	-	4.2	405	3.2
3.1	550	2.4	439.3	"	"	13600	-	3.7	460	2.8
2.8	610	2.1	496.4	"	"	13600	-	3.3	520	2.5
2.5	680	1.9	555.2	"	"	13600	-	3.0	570	2.3
2.0	660	2.1	680.9	BF50G10-../D06LA4	87	13600	-	2.4	520	2.7
1.6	860	1.65	864.5	"	"	13600	-	1.9	690	2.0
1.4	1000	1.4	1029	"	"	13600	-	1.6	840	1.65
1.2	1220	1.15	1203	"	"	13600	-	1.4	1010	1.4
1.0	1470	0.95	1359	"	"	13600	-	1.2	1190	1.2
0.85	1400*	1.0	1684	"	"	13600	-	1.0	1400*	1.0
1.5	870	2.9	937.6	BF60G20-../D06LA4	134	15300	43300	1.8	670	3.7
1.2	1120	2.2	1211	"	"	15300	43300	1.4	920	2.7
0.95	1430	1.75	1494	"	"	15300	43300	1.1	1180	2.1
0.85	1600	1.55	1658	"	"	15300	43300	1.0	1290	1.95
0.7	2000	1.25	1955	"	"	15300	43300	0.85	1570	1.6
0.49	2500*	1.0	2781	"	"	15300	43300	0.6	2500*	1.0
0.75	1850	3.1	1912	BF70G20-../D06LA4	212	16100	47700	0.85	1580	3.6
0.6	2350	2.4	2448	"	"	16100	47700	0.7	1970	2.9
0.48	3050	1.85	2849	"	"	16100	47700	0.6	2350	2.4
0.4	3800	1.5	3417	"	"	16100	47700	0.48	3050	1.85
0.34	4550	1.25	4090	"	"	16100	47700	0.4	3800	1.5
0.3	5200	1.1	4542	"	"	16100	47700	0.36	4250	1.35
0.24	5700*	1.0	5691	"	"	16100	47700	0.29	5700*	1.0

P = 0.25 kW

177	13.4	5.1	7.66	BF06-../D06LA4 #	12	1800	-	215	11.1	6.1
147	16.2	4.3	9.21	"	"	1900	-	176	13.5	5.2
112	21	3.6	12.07	"	"	2000	-	135	17.6	4.3
96	24.5	3.5	14.21	"	"	2100	-	115	20.5	4.1
80	29.5	3.2	16.99	"	"	2500	-	96	24.5	3.9
67	35.5	2.7	20.42	"	"	2700	-	80	29.5	3.2
51	46.5	2.0	26.76	"	"	3000	-	61	39	2.4
43	55	1.75	31.50	"	"	3200	-	52	45.5	2.1
36	66	1.45	37.69	"	"	3500	-	43	55	1.75
29.5	80	1.2	46.14	"	"	3800	-	35.5	67	1.4
23.5	101	0.94	58.33	"	"	4000	-	28	85	1.1
20.5	116	0.82	66.82	"	"	4300	-	24.5	97	0.98
31.5	75	3.2	43.06	BF10-../D06LA4	23	4100	-	38	62	3.9
29	82	2.9	47.35	"	"	4250	-	34.5	69	3.5
26.5	90	2.7	51.28	"	"	4400	-	32	74	3.2
24	99	2.4	56.39	"	"	4550	-	29	82	2.9
22	108	2.2	61.55	"	"	4700	-	26.5	90	2.7
20	119	2.0	67.69	"	"	4900	-	24	99	2.4
17.5	136	1.75	77.55	"	"	5100	-	21	113	2.1
16	149	1.6	85.27	"	"	5300	-	19	125	1.9
15	159	1.5	90.91	"	"	5400	-	18	132	1.8
14	170	1.4	99.97	"	"	5600	-	16.5	144	1.65
12.5	191	1.25	112.3	"	"	5900	-	14.5	164	1.45
11	215	1.1	123.5	"	"	6100	-	13.5	176	1.35
10.5	225	1.05	128.9	"	"	6200	-	13	183	1.3
9.6	245	0.98	141.8	"	"	6400	-	11.5	205	1.15
9.0	265	0.91	151.2	BF10Z-../D06LA4	25	6400	-	11	215	1.1
8.2	290	0.83	166.2	"	"	6400	-	9.8	240	1.0




P = 0.25 kW



Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
18	132	3.2	76.69	BF20-../D06LA4	30	6300	-	21.5	111	3.8
15.5	154	2.7	87.31	"	"	6600	-	19	125	3.4
14.5	164	2.6	96.08	"	"	6900	-	17	140	3.0
13.5	176	2.4	100.2	"	"	7000	-	16.5	144	2.9
12.5	191	2.2	110.2	"	"	7300	-	15	159	2.6
11	215	1.95	123.5	"	"	7600	-	13.5	176	2.4
10	235	1.8	135.9	"	"	7900	-	12	198	2.1
9.6	245	1.7	141.2	BF20Z-../D06LA4	31	7900	-	11.5	205	2.0
8.7	270	1.55	155.4	"	"	7900	-	10.5	225	1.85
8.3	285	1.45	164.3	"	"	7900	-	9.9	240	1.75
7.5	315	1.35	180.8	"	"	7900	-	9.0	265	1.6
6.9	345	1.2	197.1	"	"	7900	-	8.3	285	1.45
6.3	375	1.1	216.9	"	"	7900	-	7.5	315	1.35
5.8	410	1.0	235.9	"	"	7900	-	6.9	345	1.2
5.3	450	0.93	259.6	"	"	7900	-	6.3	375	1.1
4.6	510	0.82	295.5	"	"	7900	-	5.5	430	0.98
13	183	3.1	107.6	BF30-../D06LA4	40	6700	-	15.5	154	3.7
11.5	205	2.8	118.3	"	"	7000	-	14	170	3.4
11	215	2.7	124.7	"	"	7100	-	13	183	3.1
9.9	240	2.4	137.1	"	"	7400	-	12	198	2.9
9.0	265	2.2	150.7	BF30Z-../D06LA4	42	7400	-	11	215	2.7
8.2	290	2.0	165.8	"	"	7400	-	9.8	240	2.4
7.7	310	1.85	176.6	"	"	7400	-	9.2	255	2.3
7.0	340	1.7	194.3	"	"	7400	-	8.4	280	2.1
6.1	390	1.45	224.8	"	"	7400	-	7.3	325	1.75
5.5	430	1.35	247.3	"	"	7400	-	6.6	360	1.6
5.2	455	1.25	263.5	"	"	7400	-	6.2	385	1.5
4.7	500	1.15	289.8	"	"	7400	-	5.6	425	1.35
4.4	540	1.05	310.7	"	"	7400	-	5.3	450	1.3
4.0	590	0.97	341.8	"	"	7400	-	4.8	495	1.15
3.6	660	0.87	375.1	"	"	7400	-	4.4	540	1.05
3.3	720	0.8	412.6	"	"	7400	-	4.0	590	0.97
8.7	270	3.3	155.6	BF40Z-../D06LA4	53	10600	-	10.5	225	4.0
7.9	300	3.0	171.2	"	"	10600	-	9.5	250	3.6
7.2	330	2.7	188.3	"	"	10600	-	8.7	270	3.3
6.7	355	2.5	202.2	"	"	10600	-	8.1	290	3.1
6.1	390	2.3	222.4	"	"	10600	-	7.3	325	2.8
5.4	440	2.0	253.2	"	"	10600	-	6.4	370	2.4
4.9	485	1.85	278.5	"	"	10600	-	5.9	400	2.3
4.6	510	1.75	295.1	"	"	10600	-	5.5	430	2.1
4.2	560	1.6	324.7	"	"	10600	-	5.0	475	1.9
3.9	610	1.5	346.8	"	"	10600	-	4.7	500	1.8
3.6	660	1.35	381.5	"	"	10600	-	4.3	550	1.65
3.3	720	1.25	417.3	"	"	10600	-	3.9	610	1.5
3.0	790	1.15	459.1	"	"	10600	-	3.6	660	1.35
2.7	880	1.0	514.6	"	"	10600	-	3.2	740	1.2
2.4	990	0.91	566.1	"	"	10600	-	2.9	820	1.1
2.3	850	1.2	597.3	BF40G10-../D06LA4	58	10600	-	2.8	660	1.5
1.9	1050	0.95	731.6	"	"	10600	-	2.3	830	1.2
5.5	430	3.0	247.5	BF50Z-../D06LA4	83	13600	-	6.6	360	3.6
4.9	485	2.7	276.8	"	"	13600	-	5.9	400	3.3
4.3	550	2.4	316.6	"	"	13600	-	5.2	455	2.9
3.9	610	2.1	354.0	"	"	13600	-	4.6	510	2.5
3.5	680	1.9	392.8	"	"	13600	-	4.2	560	2.3
3.1	770	1.7	439.3	"	"	13600	-	3.7	640	2.0
2.8	850	1.55	496.4	"	"	13600	-	3.3	720	1.8
2.5	950	1.35	555.2	"	"	13600	-	3.0	790	1.65
2.0	1000	1.4	680.9	BF50G10-../D06LA4	87	13600	-	2.4	800	1.75
1.6	1280	1.1	864.5	"	"	13600	-	1.9	1050	1.35
1.4	1480	0.95	1029	"	"	13600	-	1.6	1260	1.1
2.4	750	3.3	569.3	BF60G20-../D06LA4	134	15300	43300	2.9	580	4.3
2.0	900	2.8	689.0	"	"	15300	43300	2.4	700	3.6
1.7	1090	2.3	813.2	"	"	15300	43300	2.0	880	2.8

P = 0.25 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
1.5	1310	1.9	937.6	BF60G20-../D06LA4	134	15300	43300	1.8	1050	2.4
1.2	1680	1.5	1211	"	"	15300	43300	1.4	1390	1.8
0.95	2100	1.2	1494	"	"	15300	43300	1.1	1790	1.4
0.85	2350	1.05	1658	"	"	15300	43300	1.0	1960	1.3
0.7	2500*	1.0	1955	"	"	15300	43300	0.85	2500*	1.0
1.0	2000	2.9	1390	BF70G20-../D06LA4	212	16100	47700	1.2	1630	3.5
0.85	2350	2.4	1621	"	"	16100	47700	1.0	1970	2.9
0.75	2700	2.1	1912	"	"	16100	47700	0.85	2350	2.4
0.6	3500	1.65	2448	"	"	16100	47700	0.7	2900	1.95
0.48	4450	1.3	2849	"	"	16100	47700	0.6	3450	1.65
0.4	5400	1.05	3417	"	"	16100	47700	0.48	4450	1.3
0.34	5700*	1.0	4090	"	"	16100	47700	0.4	5700*	1.0

P = 0.3 kW

177	16.1	4.2	7.66	BF06-../D07LA4 #	15	1800	-	215	13.3	5.1
147	19.4	3.6	9.21	"	"	1900	-	176	16.2	4.3
112	25.5	2.9	12.07	"	"	2000	-	135	21	3.6
96	29.5	2.9	14.21	"	"	2100	-	115	24.5	3.5
80	35.5	2.7	16.99	"	"	2500	-	96	29.5	3.2
67	42.5	2.2	20.42	"	"	2700	-	80	35.5	2.7
51	56	1.7	26.76	"	"	3000	-	61	46.5	2.0
43	66	1.45	31.50	"	"	3200	-	52	55	1.75
36	79	1.2	37.69	"	"	3500	-	43	66	1.45
29.5	97	0.98	46.14	"	"	3800	-	35.5	80	1.2
37.5	76	3.2	36.15	BF10-../D07LA4	26	3800	-	45	63	3.8
34	84	2.9	39.75	"	"	3950	-	41	69	3.5
31.5	90	2.7	43.06	"	"	4100	-	38	75	3.2
29	98	2.4	47.35	"	"	4250	-	34.5	83	2.9
26.5	108	2.2	51.28	"	"	4400	-	32	89	2.7
24	119	2.0	56.39	"	"	4550	-	29	98	2.4
22	130	1.85	61.55	"	"	4700	-	26.5	108	2.2
20	143	1.7	67.69	"	"	4900	-	24	119	2.0
17.5	163	1.45	77.55	"	"	5100	-	21	136	1.75
16	179	1.35	85.27	"	"	5300	-	19	150	1.6
15	191	1.25	90.91	"	"	5400	-	18	159	1.5
14	200	1.2	99.97	"	"	5600	-	16.5	173	1.4
12.5	225	1.05	112.3	"	"	5900	-	14.5	197	1.2
11	260	0.92	123.5	"	"	6100	-	13.5	210	1.15
10.5	270	0.89	128.9	"	"	6200	-	13	220	1.1
9.6	295	0.81	141.8	"	"	6400	-	11.5	245	0.98
21.5	133	3.2	64.08	BF20-../D07LA4	32	5900	-	25.5	112	3.8
19.5	146	2.9	69.70	"	"	6100	-	23.5	121	3.5
18	159	2.6	76.69	"	"	6300	-	21.5	133	3.2
15.5	184	2.3	87.31	"	"	6600	-	19	150	2.8
14.5	197	2.1	96.08	"	"	6900	-	17	168	2.5
13.5	210	2.0	100.2	"	"	7000	-	16.5	173	2.4
12.5	225	1.85	110.2	"	"	7300	-	15	191	2.2
11	260	1.6	123.5	"	"	7600	-	13.5	210	2.0
10	285	1.45	135.9	"	"	7900	-	12	235	1.8
9.6	295	1.4	141.2	BF20Z-../D07LA4	34	7900	-	11.5	245	1.7
8.7	325	1.3	155.4	"	"	7900	-	10.5	270	1.55
8.3	345	1.2	164.3	"	"	7900	-	9.9	285	1.45
7.5	380	1.1	180.8	"	"	7900	-	9.0	315	1.35
6.9	415	1.0	197.1	"	"	7900	-	8.3	345	1.2
6.3	450	0.93	216.9	"	"	7900	-	7.5	380	1.1
5.8	490	0.86	235.9	"	"	7900	-	6.9	415	1.0
16	179	3.2	87.08	BF30-../D07LA4	42	6200	-	19	150	3.8
14.5	197	2.9	95.79	"	"	6400	-	17	168	3.4
13	220	2.6	107.6	"	"	6700	-	15.5	184	3.1
11.5	245	2.3	118.3	"	"	7000	-	14	200	2.9
11	260	2.2	124.7	"	"	7100	-	13	220	2.6

P = 0.3 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
9.9	285	2.0	137.1	BF30-../D07LA4	42	7400	-	12	235	2.4
9.0	315	1.85	150.7	BF30Z-../D07LA4	45	7400	-	11	260	2.2
8.2	345	1.65	165.8	"	"	7400	-	9.8	290	2.0
7.7	370	1.55	176.6	"	"	7400	-	9.2	310	1.85
7.0	405	1.4	194.3	"	"	7400	-	8.4	340	1.7
6.1	465	1.25	224.8	"	"	7400	-	7.3	390	1.45
5.5	520	1.1	247.3	"	"	7400	-	6.6	430	1.35
5.2	550	1.05	263.5	"	"	7400	-	6.2	460	1.25
4.7	600	0.96	289.8	"	"	7400	-	5.6	510	1.15
4.4	650	0.88	310.7	"	"	7400	-	5.3	540	1.05
4.0	710	0.81	341.8	"	"	7400	-	4.8	590	0.97
9.6	295	3.1	141.4	BF40Z-../D07LA4	55	10600	-	11.5	245	3.7
8.7	325	2.8	155.6	"	"	10600	-	10.5	270	3.3
7.9	360	2.5	171.2	"	"	10600	-	9.5	300	3.0
7.2	395	2.3	188.3	"	"	10600	-	8.7	325	2.8
6.7	425	2.1	202.2	"	"	10600	-	8.1	350	2.6
6.1	465	1.95	222.4	"	"	10600	-	7.3	390	2.3
5.4	530	1.7	253.2	"	"	10600	-	6.4	445	2.0
4.9	580	1.55	278.5	"	"	10600	-	5.9	485	1.85
4.6	620	1.45	295.1	"	"	10600	-	5.5	520	1.75
4.2	680	1.3	324.7	"	"	10600	-	5.0	570	1.6
3.9	730	1.25	346.8	"	"	10600	-	4.7	600	1.5
3.6	790	1.15	381.5	"	"	10600	-	4.3	660	1.35
3.3	860	1.05	417.3	"	"	10600	-	3.9	730	1.25
3.0	950	0.95	459.1	"	"	10600	-	3.6	790	1.15
2.7	1060	0.85	514.6	"	"	10600	-	3.2	890	1.0
2.3	1050	0.95	597.3	BF40G10-../D07LA4	61	10600	-	2.8	830	1.2
6.6	430	3.0	205.2	BF50Z-../D07LA4	85	13600	-	7.9	360	3.6
5.5	520	2.5	247.5	"	"	13600	-	6.6	430	3.0
4.9	580	2.2	276.8	"	"	13600	-	5.9	485	2.7
4.3	660	1.95	316.6	"	"	13600	-	5.2	550	2.4
3.9	730	1.8	354.0	"	"	13600	-	4.6	620	2.1
3.5	810	1.6	392.8	"	"	13600	-	4.2	680	1.9
3.1	920	1.4	439.3	"	"	13600	-	3.7	770	1.7
2.8	1020	1.25	496.4	"	"	13600	-	3.3	860	1.5
2.5	1140	1.15	555.2	"	"	13600	-	3.0	950	1.35
2.0	1240	1.15	680.9	BF50G10-../D07LA4	89	13600	-	2.4	1000	1.4
1.6	1580	0.89	864.5	"	"	13600	-	1.9	1300	1.1
2.4	950	2.6	569.3	BF60G20-../D07LA4	136	15300	43300	2.9	740	3.4
2.0	1140	2.2	689.0	"	"	15300	43300	2.4	900	2.8
1.7	1370	1.8	813.2	"	"	15300	43300	2.0	1120	2.2
1.5	1630	1.55	937.6	"	"	15300	43300	1.8	1310	1.9
1.2	2050	1.2	1211	"	"	15300	43300	1.4	1740	1.45
0.95	2500*	1.0	1494	"	"	15300	43300	1.1	2500*	1.0
0.85	2500*	1.0	1658	"	"	15300	43300	1.0	2500*	1.0
1.4	1740	3.3	1017	BF70G20-../D07LA4	215	16100	47700	1.6	1490	3.8
1.0	2500	2.3	1390	"	"	16100	47700	1.2	2000	2.9
0.85	2950	1.95	1621	"	"	16100	47700	1.0	2450	2.3
0.75	3350	1.7	1912	"	"	16100	47700	0.85	2900	1.95
0.6	4250	1.35	2448	"	"	16100	47700	0.7	3600	1.6
0.48	5400	1.05	2849	"	"	16100	47700	0.6	4250	1.35
0.4	5700*	1.0	3417	"	"	16100	47700	0.48	5700*	1.0

P = 0.37 kW

177	19.9	3.4	7.66	BF06-../D07LA4 #	15	1800	-	215	16.4	4.1
147	24	2.9	9.21	"	"	1900	-	176	20	3.5
112	31.5	2.4	12.07	"	"	2000	-	135	26	2.9
96	36.5	2.3	14.21	"	"	2100	-	115	30.5	2.8
80	44	2.2	16.99	"	"	2500	-	96	36.5	2.6
67	52	1.85	20.42	"	"	2700	-	80	44	2.2

P = 0.37 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
51	69	1.4	26.76	BF06-../D07LA4 #	15	3000	-	61	57	1.65
43	82	1.15	31.50	"	"	3200	-	52	67	1.4
36	98	0.97	37.69	"	"	3500	-	43	82	1.15
29.5	119	0.8	46.14	"	"	3800	-	35.5	99	0.96
47.5	74	3.2	28.47	BF10-../D07LA4	26	3450	-	57	61	3.9
43.5	81	3.0	31.31	"	"	3600	-	52	67	3.6
37.5	94	2.6	36.15	"	"	3800	-	45	78	3.1
34	103	2.3	39.75	"	"	3950	-	41	86	2.8
31.5	112	2.1	43.06	"	"	4100	-	38	92	2.6
29	121	2.0	47.35	"	"	4250	-	34.5	102	2.4
26.5	133	1.8	51.28	"	"	4400	-	32	110	2.2
24	147	1.65	56.39	"	"	4550	-	29	121	2.0
22	160	1.5	61.55	"	"	4700	-	26.5	133	1.8
20	176	1.35	67.69	"	"	4900	-	24	147	1.65
17.5	200	1.2	77.55	"	"	5100	-	21	168	1.45
16	220	1.1	85.27	"	"	5300	-	19	185	1.3
15	235	1.0	90.91	"	"	5400	-	18	196	1.2
14	250	0.96	99.97	"	"	5600	-	16.5	210	1.15
12.5	280	0.86	112.3	"	"	5900	-	14.5	240	1.0
28	126	3.3	48.56	BF20-../D07LA4	32	5200	-	33.5	105	4.0
25.5	138	3.0	53.43	"	"	5500	-	30.5	115	3.7
23.5	150	2.8	58.24	"	"	5600	-	28	126	3.3
21.5	164	2.6	64.08	"	"	5900	-	25.5	138	3.0
19.5	181	2.3	69.70	"	"	6100	-	23.5	150	2.8
18	196	2.1	76.69	"	"	6300	-	21.5	164	2.6
15.5	225	1.85	87.31	"	"	6600	-	19	185	2.3
14.5	240	1.75	96.08	"	"	6900	-	17	205	2.0
13.5	260	1.6	100.2	"	"	7000	-	16.5	210	2.0
12.5	280	1.5	110.2	"	"	7300	-	15	235	1.8
11	320	1.3	123.5	"	"	7600	-	13.5	260	1.6
10	350	1.2	135.9	"	"	7900	-	12	290	1.45
9.6	365	1.15	141.2	BF20Z-../D07LA4	34	7900	-	11.5	305	1.4
8.7	405	1.05	155.4	"	"	7900	-	10.5	335	1.25
8.3	425	0.99	164.3	"	"	7900	-	9.9	355	1.2
7.5	470	0.89	180.8	"	"	7900	-	9.0	390	1.1
6.9	510	0.82	197.1	"	"	7900	-	8.3	425	0.99
20.5	172	3.3	67.28	BF30-../D07LA4	42	5500	-	24.5	144	4.0
19	185	3.1	72.13	"	"	5700	-	22.5	157	3.7
17.5	200	2.9	79.34	"	"	5900	-	20.5	172	3.3
16	220	2.6	87.08	"	"	6200	-	19	185	3.1
14.5	240	2.4	95.79	"	"	6400	-	17	205	2.8
13	270	2.1	107.6	"	"	6700	-	15.5	225	2.6
11.5	305	1.9	118.3	"	"	7000	-	14	250	2.3
11	320	1.8	124.7	"	"	7100	-	13	270	2.1
9.9	355	1.6	137.1	"	"	7400	-	12	290	2.0
9.0	390	1.45	150.7	BF30Z-../D07LA4	45	7400	-	11	320	1.8
8.2	430	1.35	165.8	"	"	7400	-	9.8	360	1.6
7.7	455	1.25	176.6	"	"	7400	-	9.2	380	1.5
7.0	500	1.15	194.3	"	"	7400	-	8.4	420	1.35
6.1	570	1.0	224.8	"	"	7400	-	7.3	480	1.2
5.5	640	0.9	247.3	"	"	7400	-	6.6	530	1.1
5.2	670	0.86	263.5	"	"	7400	-	6.2	560	1.05
9.6	365	2.5	141.4	BF40Z-../D07LA4	55	10600	-	11.5	305	3.0
8.7	405	2.2	155.6	"	"	10600	-	10.5	335	2.7
7.9	445	2.0	171.2	"	"	10600	-	9.5	370	2.4
7.2	490	1.85	188.3	"	"	10600	-	8.7	405	2.2
6.7	520	1.75	202.2	"	"	10600	-	8.1	435	2.1
6.1	570	1.6	222.4	"	"	10600	-	7.3	480	1.9
5.4	650	1.4	253.2	"	"	10600	-	6.4	550	1.65
4.9	720	1.25	278.5	"	"	10600	-	5.9	590	1.55
4.6	760	1.2	295.1	"	"	10600	-	5.5	640	1.4
4.2	840	1.05	324.7	"	"	10600	-	5.0	700	1.3
3.9	900	1.0	346.8	"	"	10600	-	4.7	750	1.2



P = 0.37 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
3.6	980	0.92	381.5	BF40Z-../D07LA4	55	10600	-	4.3	820	1.1
3.3	1070	0.84	417.3	"	"	10600	-	3.9	900	1.0
8.8	400	3.3	154.5	BF50Z-../D07LA4	85	13600	-	10.5	335	3.9
7.4	475	2.7	183.5	"	"	13600	-	8.9	395	3.3
6.6	530	2.5	205.2	"	"	13600	-	7.9	445	2.9
5.5	640	2.0	247.5	"	"	13600	-	6.6	530	2.5
4.9	720	1.8	276.8	"	"	13600	-	5.9	590	2.2
4.3	820	1.6	316.6	"	"	13600	-	5.2	670	1.95
3.9	900	1.45	354.0	"	"	13600	-	4.6	760	1.7
3.5	1000	1.3	392.8	"	"	13600	-	4.2	840	1.55
3.1	1130	1.15	439.3	"	"	13600	-	3.7	950	1.35
2.8	1260	1.05	496.4	"	"	13600	-	3.3	1070	1.2
2.5	1410	0.92	555.2	"	"	13600	-	3.0	1170	1.1
2.0	1570	0.89	680.9	BF50G10-../D07LA4	89	13600	-	2.4	1280	1.1
2.4	1230	2.0	569.3	BF60G20-../D07LA4	136	15300	43300	2.9	970	2.6
2.0	1470	1.7	689.0	"	"	15300	43300	2.4	1180	2.1
1.7	1770	1.4	813.2	"	"	15300	43300	2.0	1460	1.7
1.5	2050	1.2	937.6	"	"	15300	43300	1.8	1680	1.5
1.2	2600	0.96	1211	"	"	15300	43300	1.4	2200	1.15
1.6	1950	2.9	872.1	BF70G20-../D07LA4	215	16100	47700	1.9	1600	3.6
1.4	2200	2.6	1017	"	"	16100	47700	1.6	1900	3.0
1.0	3150	1.8	1390	"	"	16100	47700	1.2	2550	2.2
0.85	3700	1.55	1621	"	"	16100	47700	1.0	3100	1.85
0.75	4250	1.35	1912	"	"	16100	47700	0.85	3700	1.55
0.6	5400	1.05	2448	"	"	16100	47700	0.7	4550	1.25
0.48	5700*	1.0	2849	"	"	16100	47700	0.6	5700*	1.0

P = 0.55 kW

183	28.5	2.4	7.66	BF06-../D08MA4 #	16	1800	-	220	23.5	2.9
153	34	2.1	9.21	"	"	1900	-	183	28.5	2.5
116	45	1.65	12.07	"	"	2000	-	140	37.5	2.0
99	53	1.6	14.21	"	"	2100	-	119	44	1.95
83	63	1.5	16.99	"	"	2500	-	99	53	1.8
69	76	1.25	20.42	"	"	2700	-	83	63	1.5
53	99	0.96	26.76	"	"	3000	-	63	83	1.15
44.5	118	0.81	31.50	"	"	3200	-	54	97	0.98
94	55	3.3	15.04	BF10-../D08MA4	27	2800	-	112	46.5	3.9
77	68	3.5	18.23	"	"	2900	-	93	56	4.3
70	75	3.2	20.05	"	"	3000	-	84	62	3.9
61	86	2.8	23.28	"	"	3200	-	73	71	3.4
55	95	2.5	25.60	"	"	3350	-	66	79	3.0
49.5	106	2.3	28.47	"	"	3450	-	60	87	2.8
45	116	2.1	31.31	"	"	3600	-	54	97	2.5
39	134	1.8	36.15	"	"	3800	-	46.5	112	2.1
35.5	147	1.65	39.75	"	"	3950	-	42.5	123	1.95
33	159	1.5	43.06	"	"	4100	-	39.5	132	1.8
30	175	1.35	47.35	"	"	4250	-	35.5	147	1.65
27.5	191	1.25	51.28	"	"	4400	-	33	159	1.5
25	210	1.15	56.39	"	"	4550	-	30	175	1.35
23	225	1.05	61.55	"	"	4700	-	27.5	191	1.25
21	250	0.96	67.69	"	"	4900	-	25	210	1.15
18.5	280	0.86	77.55	"	"	5100	-	22	235	1.0
39.5	132	3.2	35.85	BF20-../D08MA4	33	4650	-	47	111	3.8
34	154	2.7	41.72	"	"	4950	-	40.5	129	3.3
31	169	2.5	45.90	"	"	5100	-	37	141	3.0
29	181	2.3	48.56	"	"	5200	-	35	150	2.8
26.5	198	2.1	53.43	"	"	5500	-	31.5	166	2.5
24.5	210	2.0	58.24	"	"	5600	-	29	181	2.3
22	235	1.8	64.08	"	"	5900	-	26.5	198	2.1
20.5	255	1.65	69.70	"	"	6100	-	24.5	210	2.0


P = 0.55 kW



Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
18.5	280	1.5	76.69	BF20-../D08MA4	33	6300	-	22	235	1.8
16.5	315	1.35	87.31	"	"	6600	-	19.5	265	1.6
15	350	1.2	96.08	"	"	6900	-	17.5	300	1.4
14	375	1.1	100.2	"	"	7000	-	17	305	1.4
13	400	1.05	110.2	"	"	7300	-	15.5	335	1.25
11.5	455	0.92	123.5	"	"	7600	-	14	375	1.1
10.5	500	0.84	135.9	"	"	7900	-	12.5	420	1.0
10	520	0.81	141.2	BF20Z-../D08MA4	35	7900	-	12	435	0.97
27	194	3.0	52.20	BF30-../D08MA4	43	5000	-	32.5	161	3.6
24.5	210	2.7	57.41	"	"	5200	-	29.5	178	3.2
23	225	2.6	61.17	"	"	5300	-	27.5	191	3.0
21	250	2.3	67.28	"	"	5500	-	25	210	2.7
19.5	265	2.2	72.13	"	"	5700	-	23.5	220	2.6
18	290	2.0	79.34	"	"	5900	-	21.5	240	2.4
16.5	315	1.85	87.08	"	"	6200	-	19.5	265	2.2
15	350	1.65	95.79	"	"	6400	-	18	290	2.0
13.5	385	1.5	107.6	"	"	6700	-	16	325	1.75
12	435	1.3	118.3	"	"	7000	-	14.5	360	1.6
11.5	455	1.25	124.7	"	"	7100	-	13.5	385	1.5
10.5	500	1.15	137.1	"	"	7400	-	12.5	420	1.35
9.3	560	1.05	150.7	BF30Z-../D08MA4	46	7400	-	11.5	455	1.25
8.5	610	0.94	165.8	"	"	7400	-	10.5	500	1.15
8.0	650	0.88	176.6	"	"	7400	-	9.6	540	1.05
7.3	710	0.81	194.3	"	"	7400	-	8.7	600	0.96
18	290	3.1	78.55	BF40-../D08MA4	53	8500	-	21.5	240	3.8
17	305	3.0	83.91	"	"	8700	-	20.5	255	3.5
15.5	335	2.7	92.31	"	"	9100	-	18.5	280	3.2
14	375	2.4	101.0	"	"	9400	-	17	305	3.0
13	400	2.3	111.1	"	"	9800	-	15.5	335	2.7
11.5	455	2.0	124.5	"	"	10200	-	13.5	385	2.3
10.5	500	1.8	137.0	"	"	10600	-	12.5	420	2.1
10	520	1.75	141.4	BF40Z-../D08MA4	56	10600	-	12	435	2.1
9.0	580	1.55	155.6	"	"	10600	-	11	475	1.9
8.2	640	1.4	171.2	"	"	10600	-	9.9	530	1.7
7.5	700	1.3	188.3	"	"	10600	-	9.0	580	1.55
7.0	750	1.2	202.2	"	"	10600	-	8.4	620	1.45
6.3	830	1.1	222.4	"	"	10600	-	7.6	690	1.3
5.6	930	0.97	253.2	"	"	10600	-	6.7	780	1.15
5.1	1020	0.88	278.5	"	"	10600	-	6.1	860	1.05
4.8	1090	0.83	295.1	"	"	10600	-	5.7	920	0.98
12.5	420	3.1	114.0	BF50-../D08MA4	81	12900	-	15	350	3.7
11	475	2.7	127.5	"	"	13600	-	13.5	385	3.4
10.5	500	2.6	138.1	BF50Z-../D08MA4	86	13600	-	12.5	420	3.1
9.1	570	2.3	154.5	"	"	13600	-	11	475	2.7
7.7	680	1.9	183.5	"	"	13600	-	9.2	570	2.3
6.9	760	1.7	205.2	"	"	13600	-	8.2	640	2.0
5.7	920	1.4	247.5	"	"	13600	-	6.8	770	1.7
5.1	1020	1.25	276.8	"	"	13600	-	6.1	860	1.5
4.5	1160	1.1	316.6	"	"	13600	-	5.4	970	1.35
4.0	1310	0.99	354.0	"	"	13600	-	4.8	1090	1.2
3.6	1450	0.9	392.8	"	"	13600	-	4.3	1220	1.05
7.5	700	3.3	187.7	BF60Z-../D08MA4	130	15300	43300	9.0	580	4.0
6.4	820	2.8	221.4	"	"	15300	43300	7.6	690	3.3
5.8	900	2.6	245.6	"	"	15300	43300	6.9	760	3.0
4.8	1090	2.1	293.4	"	"	15300	43300	5.8	900	2.6
4.3	1220	1.9	325.6	"	"	15300	43300	5.2	1010	2.3
3.7	1410	1.65	380.0	"	"	15300	43300	4.5	1160	2.0
3.4	1540	1.5	421.6	"	"	15300	43300	4.0	1310	1.75
3.1	1690	1.35	459.9	"	"	15300	43300	3.7	1410	1.65
2.8	1870	1.25	510.3	"	"	15300	43300	3.3	1590	1.45
2.5	1860	1.35	569.3	BF60G20-../D08MA4	137	15300	43300	3.0	1510	1.65
2.1	2200	1.15	689.0	"	"	15300	43300	2.5	1810	1.4
1.8	2600	0.96	813.2	"	"	15300	43300	2.1	2150	1.15

P = 0.55 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
3.2	1640	3.2	439.2	BF70Z-../D08MA4	218	16100	47700	3.9	1340	3.9
2.8	1870	2.8	512.4	"	"	16100	47700	3.3	1590	3.3
2.7	1720	3.3	524.1	BF70G20-../D08MA4	216	16100	47700	3.3	1370	4.2
2.1	2200	2.6	673.6	"	"	16100	47700	2.5	1810	3.1
1.7	2800	2.0	872.1	"	"	16100	47700	2.0	2350	2.4
1.4	3450	1.65	1017	"	"	16100	47700	1.7	2750	2.1
1.1	4400	1.3	1390	"	"	16100	47700	1.3	3650	1.55
0.9	5400	1.05	1621	"	"	16100	47700	1.1	4350	1.3
0.75	5700*	1.0	1912	"	"	16100	47700	0.9	5700*	1.0
1.5	3500	3.0	990.4	BF80Z-../D08MA4	335	39600	75000	1.7	3050	3.4
1.3	4000	2.6	1124	"	"	39600	75000	1.5	3500	3.0
1.1	3300	3.2	1329	BF80G40-../D08MA4	340	39600	75000	1.3	2550	4.1
0.95	4100	2.6	1491	"	"	39600	75000	1.2	2950	3.6
0.85	4550	2.3	1693	"	"	39600	75000	1.0	3650	2.9
0.7	5900	1.8	2051	"	"	39600	75000	0.85	4550	2.3
0.6	7100	1.5	2422	"	"	39600	75000	0.7	5900	1.8
0.46	9300	1.15	3092	"	"	39600	75000	0.55	7400	1.4
0.41	10500*	1.0	3461	"	"	39600	75000	0.49	10500*	1.0
0.37	10500*	1.0	3843	"	"	39600	75000	0.44	10500*	1.0
0.65	6000	3.1	2154	BF90G50-../D08MA4	611	42800	120000	0.8	4500	4.1
0.55	7100	2.6	2656	"	"	42800	120000	0.65	5700	3.2
0.48	8600	2.2	2952	"	"	42800	120000	0.6	6500	2.8
0.43	9700	1.9	3286	"	"	42800	120000	0.55	7000	2.6
0.33	13400	1.4	4366	"	"	42800	120000	0.39	10900	1.7
0.29	15600	1.2	4839	"	"	42800	120000	0.35	12500	1.5
0.24	18500*	1.0	5888	"	"	42800	120000	0.29	18500*	1.0
0.22	18500*	1.0	6529	"	"	42800	120000	0.26	18500*	1.0

P = 0.75 kW

183	39	1.75	7.66	BF06-../D08LA4 #	17	1800	-	220	32.5	2.1
153	46.5	1.5	9.21	"	"	1900	-	183	39	1.8
116	61	1.25	12.07	"	"	2000	-	140	51	1.45
99	72	1.2	14.21	"	"	2100	-	119	60	1.4
83	86	1.1	16.99	"	"	2500	-	99	72	1.3
69	103	0.92	20.42	"	"	2700	-	83	86	1.1
119	60	3.1	11.84	BF10-../D08LA4	29	2500	-	142	50	3.7
94	76	2.4	15.04	"	"	2800	-	112	63	2.9
77	93	2.6	18.23	"	"	2900	-	93	77	3.1
70	102	2.4	20.05	"	"	3000	-	84	85	2.8
61	117	2.1	23.28	"	"	3200	-	73	98	2.4
55	130	1.85	25.60	"	"	3350	-	66	108	2.2
49.5	144	1.65	28.47	"	"	3450	-	60	119	2.0
45	159	1.5	31.31	"	"	3600	-	54	132	1.8
39	183	1.3	36.15	"	"	3800	-	46.5	154	1.55
35.5	200	1.2	39.75	"	"	3950	-	42.5	168	1.45
33	215	1.1	43.06	"	"	4100	-	39.5	181	1.35
30	235	1.0	47.35	"	"	4250	-	35.5	200	1.2
27.5	260	0.92	51.28	"	"	4400	-	33	215	1.1
25	285	0.84	56.39	"	"	4550	-	30	235	1.0
58	123	3.3	24.25	BF20-../D08LA4	35	3950	-	70	102	4.0
51	140	3.0	27.62	"	"	4150	-	61	117	3.6
46.5	154	2.7	30.40	"	"	4400	-	56	127	3.3
43	166	2.5	32.58	"	"	4450	-	52	137	3.1
39.5	181	2.3	35.85	"	"	4650	-	47	152	2.8
34	210	2.0	41.72	"	"	4950	-	40.5	176	2.4
31	230	1.85	45.90	"	"	5100	-	37	193	2.2
29	245	1.7	48.56	"	"	5200	-	35	200	2.1
26.5	270	1.55	53.43	"	"	5500	-	31.5	225	1.85
24.5	290	1.45	58.24	"	"	5600	-	29	245	1.7
22	325	1.3	64.08	"	"	5900	-	26.5	270	1.55
20.5	345	1.2	69.70	"	"	6100	-	24.5	290	1.45

P = 0.75 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
18.5	385	1.1	76.69	BF20-../D08LA4	35	6300	-	22	325	1.3
16.5	430	0.98	87.31	"	"	6600	-	19.5	365	1.15
15	475	0.88	96.08	"	"	6900	-	17.5	405	1.05
14	510	0.82	100.2	"	"	7000	-	17	420	1.0
40	179	3.2	35.00	BF30-../D08LA4	45	4200	-	48	149	3.9
36.5	196	2.9	38.49	"	"	4400	-	44	162	3.5
34.5	205	2.8	41.01	"	"	4500	-	41	174	3.3
31.5	225	2.6	45.10	"	"	4700	-	37.5	191	3.0
27	265	2.2	52.20	"	"	5000	-	32.5	220	2.6
24.5	290	2.0	57.41	"	"	5200	-	29.5	240	2.4
23	310	1.85	61.17	"	"	5300	-	27.5	260	2.2
21	340	1.7	67.28	"	"	5500	-	25	285	2.0
19.5	365	1.6	72.13	"	"	5700	-	23.5	300	1.9
18	395	1.45	79.34	"	"	5900	-	21.5	330	1.75
16.5	430	1.35	87.08	"	"	6200	-	19.5	365	1.6
15	475	1.2	95.79	"	"	6400	-	18	395	1.45
13.5	530	1.1	107.6	"	"	6700	-	16	445	1.3
12	590	0.97	118.3	"	"	7000	-	14.5	490	1.15
11.5	620	0.93	124.7	"	"	7100	-	13.5	530	1.1
10.5	680	0.85	137.1	"	"	7400	-	12.5	570	1.0
26.5	270	3.3	53.82	BF40-../D08LA4	54	7200	-	31.5	225	4.0
23	310	2.9	61.25	"	"	7600	-	27.5	260	3.5
21	340	2.6	67.38	"	"	8000	-	25	285	3.2
20	355	2.5	71.40	"	"	8100	-	24	295	3.1
18	395	2.3	78.55	"	"	8500	-	21.5	330	2.7
17	420	2.1	83.91	"	"	8700	-	20.5	345	2.6
15.5	460	1.95	92.31	"	"	9100	-	18.5	385	2.3
14	510	1.75	101.0	"	"	9400	-	17	420	2.1
13	550	1.65	111.1	"	"	9800	-	15.5	460	1.95
11.5	620	1.45	124.5	"	"	10200	-	13.5	530	1.7
10.5	680	1.3	137.0	"	"	10600	-	12.5	570	1.6
10	710	1.25	141.4	BF40Z-../D08LA4	58	10600	-	12	590	1.55
9.0	790	1.15	155.6	"	"	10600	-	11	650	1.4
8.2	870	1.05	171.2	"	"	10600	-	9.9	720	1.25
7.5	950	0.95	188.3	"	"	10600	-	9.0	790	1.15
7.0	1020	0.88	202.2	"	"	10600	-	8.4	850	1.05
6.3	1130	0.8	222.4	"	"	10600	-	7.6	940	0.96
17.5	405	3.2	81.33	BF50-../D08LA4	83	11300	-	21	340	3.8
16	445	2.9	90.24	"	"	11800	-	19	375	3.5
14	510	2.5	100.9	"	"	12300	-	17	420	3.1
12.5	570	2.3	114.0	"	"	12900	-	15	475	2.7
11	650	2.0	127.5	"	"	13600	-	13.5	530	2.5
10.5	680	1.9	138.1	BF50Z-../D08LA4	88	13600	-	12.5	570	2.3
9.1	780	1.65	154.5	"	"	13600	-	11	650	2.0
7.7	930	1.4	183.5	"	"	13600	-	9.2	770	1.7
6.9	1030	1.25	205.2	"	"	13600	-	8.2	870	1.5
5.7	1250	1.05	247.5	"	"	13600	-	6.8	1050	1.25
5.1	1400	0.93	276.8	"	"	13600	-	6.1	1170	1.1
4.5	1590	0.82	316.6	"	"	13600	-	5.4	1320	0.98
10	710	3.2	140.8	BF60Z-../D08LA4	131	15300	43300	12	590	3.9
8.3	860	2.7	169.2	"	"	15300	43300	10	710	3.2
7.5	950	2.4	187.7	"	"	15300	43300	9.0	790	2.9
6.4	1110	2.1	221.4	"	"	15300	43300	7.6	940	2.4
5.8	1230	1.85	245.6	"	"	15300	43300	6.9	1030	2.2
4.8	1490	1.55	293.4	"	"	15300	43300	5.8	1230	1.85
4.3	1660	1.4	325.6	"	"	15300	43300	5.2	1370	1.7
3.7	1930	1.2	380.0	"	"	15300	43300	4.5	1590	1.45
3.4	2100	1.1	421.6	"	"	15300	43300	4.0	1790	1.3
3.1	2300	1.0	459.9	"	"	15300	43300	3.7	1930	1.2
2.8	2550	0.9	510.3	"	"	15300	43300	3.3	2150	1.05
2.5	2600	0.96	569.3	BF60G20-../D08LA4	139	15300	43300	3.0	2100	1.2
2.1	3100	0.81	689.0	"	"	15300	43300	2.5	2550	0.98



P = 0.75 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
4.1	1740	3.0	341.7	BF70Z-../D08LA4	220	16100	47700	5.0	1430	3.6
3.6	1980	2.6	398.7	"	"	16100	47700	4.3	1660	3.1
3.2	2200	2.4	439.2	"	"	16100	47700	3.9	1830	2.8
2.8	2550	2.0	512.4	"	"	16100	47700	3.3	2150	2.4
2.7	2400	2.4	524.1	BF70G20-../D08LA4	217	16100	47700	3.3	1950	2.9
2.1	3100	1.85	673.6	"	"	16100	47700	2.5	2550	2.2
1.7	3950	1.45	872.1	"	"	16100	47700	2.0	3300	1.75
1.4	4800	1.2	1017	"	"	16100	47700	1.7	3900	1.45
1.1	6100	0.93	1390	"	"	16100	47700	1.3	5100	1.1
2.2	3250	3.2	662.1	BF80Z-../D08LA4	336	39600	75000	2.6	2750	3.8
1.9	3750	2.8	770.6	"	"	39600	75000	2.2	3250	3.2
1.7	4200	2.5	874.6	"	"	39600	75000	2.0	3550	3.0
1.5	4750	2.2	990.4	"	"	39600	75000	1.7	4200	2.5
1.3	5500	1.9	1124	"	"	39600	75000	1.5	4750	2.2
1.1	5000	2.1	1329	BF80G40-../D08LA4	341	39600	75000	1.3	4050	2.6
0.95	6100	1.7	1491	"	"	39600	75000	1.2	4550	2.3
0.85	6800	1.55	1693	"	"	39600	75000	1.0	5500	1.9
0.7	8600	1.2	2051	"	"	39600	75000	0.85	6800	1.55
0.6	10300	1.0	2422	"	"	39600	75000	0.7	8600	1.2
0.55	10500*	1.0	2785	"	"	39600	75000	0.65	10500*	1.0
1.0	5700	3.2	1444	BF90G50-../D08LA4	612	42800	120000	1.2	4550	4.1
0.85	6800	2.7	1678	"	"	42800	120000	1.1	4900	3.8
0.75	7700	2.4	1867	"	"	42800	120000	0.9	6100	3.0
0.65	8900	2.1	2154	"	"	42800	120000	0.8	6800	2.7
0.55	10600	1.75	2656	"	"	42800	120000	0.65	8600	2.2
0.48	12600	1.45	2952	"	"	42800	120000	0.6	9600	1.95
0.43	14100	1.3	3286	"	"	42800	120000	0.55	10500	1.75
0.33	18500*	1.0	4366	"	"	42800	120000	0.39	18500*	1.0
0.29	18500*	1.0	4839	"	"	42800	120000	0.35	18500*	1.0

P = 1.1 kW

185	56	2.7	7.58	BF10-../D09SA4	32	2200	-	225	46.5	3.3
145	72	2.5	9.69	"	"	2350	-	174	60	3.0
119	88	2.1	11.84	"	"	2500	-	142	73	2.5
94	111	1.65	15.04	"	"	2800	-	112	93	1.95
77	136	1.75	18.23	"	"	2900	-	93	112	2.1
70	150	1.6	20.05	"	"	3000	-	84	125	1.9
61	172	1.4	23.28	"	"	3200	-	73	143	1.7
55	191	1.25	25.60	"	"	3350	-	66	159	1.5
49.5	210	1.15	28.47	"	"	3450	-	60	175	1.35
45	230	1.05	31.31	"	"	3600	-	54	194	1.25
39	265	0.91	36.15	"	"	3800	-	46.5	225	1.05
35.5	295	0.81	39.75	"	"	3950	-	42.5	245	0.98
134	78	3.3	10.51	BF20-../D09SA4	39	3100	-	160	65	3.9
107	98	2.9	13.18	"	"	3300	-	128	82	3.5
91	115	2.7	15.54	"	"	3450	-	109	96	3.2
84	125	2.9	16.77	"	"	3500	-	101	104	3.5
76	138	2.7	18.45	"	"	3600	-	92	114	3.2
64	164	2.4	22.04	"	"	3800	-	77	136	2.9
58	181	2.2	24.25	"	"	3950	-	70	150	2.7
51	205	2.0	27.62	"	"	4150	-	61	172	2.4
46.5	225	1.85	30.40	"	"	4400	-	56	187	2.2
43	240	1.75	32.58	"	"	4450	-	52	200	2.1
39.5	265	1.6	35.85	"	"	4650	-	47	220	1.9
34	305	1.4	41.72	"	"	4950	-	40.5	255	1.65
31	335	1.25	45.90	"	"	5100	-	37	280	1.5
29	360	1.15	48.56	"	"	5200	-	35	300	1.4
26.5	395	1.05	53.43	"	"	5500	-	31.5	330	1.25
24.5	425	0.99	58.24	"	"	5600	-	29	360	1.15
22	475	0.88	64.08	"	"	5900	-	26.5	395	1.05
20.5	510	0.82	69.70	"	"	6100	-	24.5	425	0.99

P = 1.1 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
65	161	3.3	21.85	BF30-../D09SA4	49	3500	-	77	136	3.9
59	178	3.1	24.03	"	"	3600	-	70	150	3.7
50	210	2.7	28.23	"	"	3800	-	60	175	3.3
45.5	230	2.5	31.05	"	"	4000	-	55	191	3.0
40	260	2.2	35.00	"	"	4200	-	48	215	2.7
36.5	285	2.0	38.49	"	"	4400	-	44	235	2.4
34.5	300	1.9	41.01	"	"	4500	-	41	255	2.3
31.5	330	1.75	45.10	"	"	4700	-	37.5	280	2.1
27	385	1.5	52.20	"	"	5000	-	32.5	320	1.8
24.5	425	1.35	57.41	"	"	5200	-	29.5	355	1.6
23	455	1.25	61.17	"	"	5300	-	27.5	380	1.5
21	500	1.15	67.28	"	"	5500	-	25	420	1.35
19.5	530	1.1	72.13	"	"	5700	-	23.5	445	1.3
18	580	0.99	79.34	"	"	5900	-	21.5	485	1.2
16.5	630	0.91	87.08	"	"	6200	-	19.5	530	1.1
15	700	0.82	95.79	"	"	6400	-	18	580	0.99
37.5	280	3.2	37.64	BF40-../D09SA4	58	6200	-	45	230	3.9
34	305	3.0	41.42	"	"	6500	-	41	255	3.5
31	335	2.7	45.56	"	"	6800	-	37	280	3.2
29	360	2.5	48.92	"	"	7000	-	34.5	300	3.0
26.5	395	2.3	53.82	"	"	7200	-	31.5	330	2.7
23	455	2.0	61.25	"	"	7600	-	27.5	380	2.4
21	500	1.8	67.38	"	"	8000	-	25	420	2.1
20	520	1.75	71.40	"	"	8100	-	24	435	2.1
18	580	1.55	78.55	"	"	8500	-	21.5	485	1.85
17	610	1.5	83.91	"	"	8700	-	20.5	510	1.75
15.5	670	1.35	92.31	"	"	9100	-	18.5	560	1.6
14	750	1.2	101.0	"	"	9400	-	17	610	1.5
13	800	1.15	111.1	"	"	9800	-	15.5	670	1.35
11.5	910	0.99	124.5	"	"	10200	-	13.5	770	1.15
10.5	1000	0.9	137.0	"	"	10600	-	12.5	840	1.05
10	1050	0.86	141.4	BF40Z-../D09SA4	62	10600	-	12	870	1.05
25	420	3.1	56.86	BF50-../D09SA4	87	9300	-	30	350	3.7
22.5	465	2.8	63.59	"	"	9800	-	26.5	395	3.3
19.5	530	2.5	72.72	"	"	10700	-	23.5	445	2.9
17.5	600	2.2	81.33	"	"	11300	-	21	500	2.6
16	650	2.0	90.24	"	"	11800	-	19	550	2.4
14	750	1.75	100.9	"	"	12300	-	17	610	2.1
12.5	840	1.55	114.0	"	"	12900	-	15	700	1.85
11	950	1.35	127.5	"	"	13600	-	13.5	770	1.7
10.5	1000	1.3	138.1	BF50Z-../D09SA4	91	13600	-	12.5	840	1.55
9.1	1150	1.15	154.5	"	"	13600	-	11	950	1.35
7.7	1360	0.96	183.5	"	"	13600	-	9.2	1140	1.15
6.9	1520	0.86	205.2	"	"	13600	-	8.2	1280	1.0
15	700	3.3	93.44	BF60-../D09SA4	116	13500	38200	18	580	4.0
14	750	3.1	103.7	"	"	14100	39900	16.5	630	3.7
12.5	840	2.7	113.1	"	"	14600	41300	15	700	3.3
11.5	910	2.5	125.5	"	"	15300	43300	13.5	770	3.0
10	1050	2.2	140.8	BF60Z-../D09SA4	135	15300	43300	12	870	2.6
8.3	1260	1.85	169.2	"	"	15300	43300	10	1050	2.2
7.5	1400	1.65	187.7	"	"	15300	43300	9.0	1160	2.0
6.4	1640	1.4	221.4	"	"	15300	43300	7.6	1380	1.65
5.8	1810	1.25	245.6	"	"	15300	43300	6.9	1520	1.5
4.8	2150	1.05	293.4	"	"	15300	43300	5.8	1810	1.25
4.3	2400	0.96	325.6	"	"	15300	43300	5.2	2000	1.15
3.7	2800	0.82	380.0	"	"	15300	43300	4.5	2300	1.0
6.1	1720	3.0	233.0	BF70Z-../D09SA4	223	16100	47700	7.3	1430	3.6
5.5	1910	2.7	258.7	"	"	16100	47700	6.5	1610	3.2
4.7	2200	2.4	301.8	"	"	16100	47700	5.6	1870	2.8
4.1	2550	2.0	341.7	"	"	16100	47700	5.0	2100	2.5
3.6	2900	1.8	398.7	"	"	16100	47700	4.3	2400	2.2
3.2	3250	1.6	439.2	"	"	16100	47700	3.9	2650	1.95
2.8	3750	1.4	512.4	"	"	16100	47700	3.3	3150	1.65



P = 1.1 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
2.7	3650	1.55	524.1	BF70G20-../D09SA4	221	16100	47700	3.3	2950	1.95
2.1	4700	1.2	673.6	"	"	16100	47700	2.5	3900	1.45
1.7	5900	0.97	872.1	"	"	16100	47700	2.0	4950	1.15
3.2	3250	3.2	450.4	BF80Z-../D09SA4	340	39600	75000	3.8	2750	3.8
2.8	3750	2.8	511.2	"	"	39600	75000	3.3	3150	3.3
2.4	4350	2.4	583.4	"	"	39600	75000	2.9	3600	2.9
2.2	4750	2.2	662.1	"	"	39600	75000	2.6	4000	2.6
1.9	5500	1.9	770.6	"	"	39600	75000	2.2	4750	2.2
1.7	6100	1.7	874.6	"	"	39600	75000	2.0	5200	2.0
1.5	7000	1.5	990.4	"	"	39600	75000	1.7	6100	1.7
1.3	8000	1.3	1124	"	"	39600	75000	1.5	7000	1.5
1.1	8100	1.3	1329	BF80G40-../D09SA4	345	39600	75000	1.3	6600	1.6
0.95	9600	1.1	1491	"	"	39600	75000	1.2	7300	1.45
0.85	10500*	1.0	1693	"	"	39600	75000	1.0	10500*	1.0
1.7	6100	3.0	845.1	BF90Z-../D09SA4	604	42800	120000	2.0	5200	3.6
1.4	6100	3.0	1043	BF90G50-../D09SA4	616	42800	120000	1.7	4750	3.9
1.2	7100	2.6	1204	"	"	42800	120000	1.4	5800	3.2
1.0	9100	2.0	1444	"	"	42800	120000	1.2	7300	2.5
0.85	10700	1.75	1678	"	"	42800	120000	1.1	7900	2.3
0.75	12200	1.5	1867	"	"	42800	120000	0.9	9800	1.9
0.65	14100	1.3	2154	"	"	42800	120000	0.8	11000	1.7
0.55	16700	1.1	2656	"	"	42800	120000	0.65	13700	1.35
0.48	18500*	1.0	2952	"	"	42800	120000	0.6	18500*	1.0
0.43	18500*	1.0	3286	"	"	42800	120000	0.55	18500*	1.0

P = 1.5 kW

185	77	2.0	7.58	BF10-../D09LA4	36	2200	-	225	63	2.4
145	98	1.8	9.69	"	"	2350	-	174	82	2.2
119	120	1.55	11.84	"	"	2500	-	142	100	1.85
94	152	1.2	15.04	"	"	2800	-	112	127	1.45
77	186	1.3	18.23	"	"	2900	-	93	154	1.55
70	200	1.2	20.05	"	"	3000	-	84	170	1.4
61	230	1.05	23.28	"	"	3200	-	73	196	1.2
55	260	0.92	25.60	"	"	3350	-	66	215	1.1
49.5	285	0.84	28.47	"	"	3450	-	60	235	1.0
175	81	2.7	8.00	BF20-../D09LA4	43	2850	-	210	68	3.2
134	106	2.4	10.51	"	"	3100	-	160	89	2.9
107	133	2.1	13.18	"	"	3300	-	128	111	2.6
91	157	1.95	15.54	"	"	3450	-	109	131	2.4
84	170	2.1	16.77	"	"	3500	-	101	141	2.6
76	188	1.95	18.45	"	"	3600	-	92	155	2.4
64	220	1.8	22.04	"	"	3800	-	77	186	2.1
58	245	1.65	24.25	"	"	3950	-	70	200	2.0
51	280	1.5	27.62	"	"	4150	-	61	230	1.85
46.5	305	1.4	30.40	"	"	4400	-	56	255	1.65
43	330	1.25	32.58	"	"	4450	-	52	275	1.55
39.5	360	1.15	35.85	"	"	4650	-	47	300	1.4
34	420	1.0	41.72	"	"	4950	-	40.5	350	1.2
31	460	0.91	45.90	"	"	5100	-	37	385	1.1
29	490	0.86	48.56	"	"	5200	-	35	405	1.05
141	101	3.2	9.99	BF30-../D09LA4	53	2850	-	169	84	3.8
109	131	2.8	12.91	"	"	3050	-	131	109	3.4
88	162	2.5	16.00	"	"	3250	-	105	136	3.0
80	179	2.7	17.65	"	"	3300	-	96	149	3.2
73	196	2.6	19.41	"	"	3400	-	87	164	3.1
65	220	2.4	21.85	"	"	3500	-	77	186	2.8
59	240	2.3	24.03	"	"	3600	-	70	200	2.8
50	285	2.0	28.23	"	"	3800	-	60	235	2.4
45.5	310	1.85	31.05	"	"	4000	-	55	260	2.2
40	355	1.6	35.00	"	"	4200	-	48	295	1.95

P = 1.5 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
36.5	390	1.45	38.49	BF30-../D09LA4	53	4400	-	44	325	1.75
34.5	415	1.4	41.01	"	"	4500	-	41	345	1.65
31.5	450	1.3	45.10	"	"	4700	-	37.5	380	1.5
27	530	1.1	52.20	"	"	5000	-	32.5	440	1.3
24.5	580	0.99	57.41	"	"	5200	-	29.5	485	1.2
23	620	0.93	61.17	"	"	5300	-	27.5	520	1.1
21	680	0.85	67.28	"	"	5500	-	25	570	1.0
65	220	3.2	21.60	BF40-../D09LA4	62	5200	-	78	183	3.8
59	240	3.1	23.77	"	"	5400	-	71	200	3.7
53	270	2.9	26.86	"	"	5600	-	63	225	3.4
47.5	300	2.7	29.55	"	"	5800	-	57	250	3.2
41	345	2.5	34.21	"	"	6000	-	49.5	285	3.0
37.5	380	2.4	37.64	"	"	6200	-	45	315	2.8
34	420	2.1	41.42	"	"	6500	-	41	345	2.6
31	460	1.95	45.56	"	"	6800	-	37	385	2.3
29	490	1.85	48.92	"	"	7000	-	34.5	415	2.2
26.5	540	1.65	53.82	"	"	7200	-	31.5	450	2.0
23	620	1.45	61.25	"	"	7600	-	27.5	520	1.75
21	680	1.3	67.38	"	"	8000	-	25	570	1.6
20	710	1.25	71.40	"	"	8100	-	24	590	1.55
18	790	1.15	78.55	"	"	8500	-	21.5	660	1.35
17	840	1.05	83.91	"	"	8700	-	20.5	690	1.3
15.5	920	0.98	92.31	"	"	9100	-	18.5	770	1.15
14	1020	0.88	101.0	"	"	9400	-	17	840	1.05
13	1100	0.82	111.1	"	"	9800	-	15.5	920	0.98
33.5	425	3.1	42.15	BF50-../D09LA4	91	8500	-	40	355	3.7
30	475	2.7	47.14	"	"	8900	-	36	395	3.3
25	570	2.3	56.86	"	"	9300	-	30	475	2.7
22.5	630	2.1	63.59	"	"	9800	-	26.5	540	2.4
19.5	730	1.8	72.72	"	"	10700	-	23.5	600	2.2
17.5	810	1.6	81.33	"	"	11300	-	21	680	1.9
16	890	1.45	90.24	"	"	11800	-	19	750	1.75
14	1020	1.25	100.9	"	"	12300	-	17	840	1.55
12.5	1140	1.15	114.0	"	"	12900	-	15	950	1.35
11	1300	1.0	127.5	"	"	13600	-	13.5	1060	1.25
10.5	1360	0.96	138.1	BF50Z-../D09LA4	95	13600	-	12.5	1140	1.15
9.1	1570	0.83	154.5	"	"	13600	-	11	1300	1.0
19.5	730	3.2	72.15	BF60-../D09LA4	120	12000	34000	23.5	600	3.8
17.5	810	2.8	80.05	"	"	12600	35600	21	680	3.4
15	950	2.4	93.44	"	"	13500	38200	18	790	2.9
14	1020	2.3	103.7	"	"	14100	39900	16.5	860	2.7
12.5	1140	2.0	113.1	"	"	14600	41300	15	950	2.4
11.5	1240	1.85	125.5	"	"	15300	43300	13.5	1060	2.2
10	1430	1.6	140.8	BF60Z-../D09LA4	139	15300	43300	12	1190	1.95
8.3	1720	1.35	169.2	"	"	15300	43300	10	1430	1.6
7.5	1910	1.2	187.7	"	"	15300	43300	9.0	1590	1.45
6.4	2200	1.05	221.4	"	"	15300	43300	7.6	1880	1.2
5.8	2450	0.94	245.6	"	"	15300	43300	6.9	2050	1.1
9.1	1570	3.3	154.0	BF70Z-../D09LA4	227	16100	47700	11	1300	4.0
7.8	1830	2.8	179.7	"	"	16100	47700	9.4	1520	3.4
7.1	2000	2.6	199.7	"	"	16100	47700	8.5	1680	3.1
6.1	2300	2.3	233.0	"	"	16100	47700	7.3	1960	2.7
5.5	2600	2.0	258.7	"	"	16100	47700	6.5	2200	2.4
4.7	3000	1.75	301.8	"	"	16100	47700	5.6	2550	2.0
4.1	3450	1.5	341.7	"	"	16100	47700	5.0	2850	1.8
3.6	3950	1.3	398.7	"	"	16100	47700	4.3	3300	1.6
3.2	4450	1.15	439.2	"	"	16100	47700	3.9	3650	1.4
2.8	5100	1.0	512.4	"	"	16100	47700	3.3	4300	1.2
2.7	5000	1.15	524.1	BF70G20-../D09LA4	225	16100	47700	3.3	4100	1.4
2.1	6500	0.88	673.6	"	"	16100	47700	2.5	5400	1.05
4.1	3450	3.0	347.3	BF80Z-../D09LA4	344	39600	75000	4.9	2900	3.6
3.6	3950	2.7	394.2	"	"	39600	75000	4.3	3300	3.2



P = 1.5 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
3.2	4450	2.4	450.4	BF80Z-../D09LA4	344	39600	75000	3.8	3750	2.8
2.8	5100	2.1	511.2	"	"	39600	75000	3.3	4300	2.4
2.4	5900	1.8	583.4	"	"	39600	75000	2.9	4900	2.1
2.2	6500	1.6	662.1	"	"	39600	75000	2.6	5500	1.9
1.9	7500	1.4	770.6	"	"	39600	75000	2.2	6500	1.6
1.7	8400	1.25	874.6	"	"	39600	75000	2.0	7100	1.5
1.5	9500	1.1	990.4	"	"	39600	75000	1.7	8400	1.25
1.3	11000	0.95	1124	"	"	39600	75000	1.5	9500	1.1
1.1	11500	0.91	1329	BF80G40-../D09LA4	349	39600	75000	1.3	9500	1.1
2.4	5900	3.1	591.1	BF90Z-../D09LA4	608	42800	120000	2.9	4900	3.8
2.2	6500	2.8	658.1	"	"	42800	120000	2.6	5500	3.4
1.9	7500	2.5	759.0	"	"	42800	120000	2.3	6200	3.0
1.7	8400	2.2	845.1	"	"	42800	120000	2.0	7100	2.6
1.5	7900	2.3	976.1	BF90G50-../D09LA4	620	42800	120000	1.8	6300	2.9
1.2	10300	1.8	1204	"	"	42800	120000	1.4	8600	2.2
1.0	12900	1.45	1444	"	"	42800	120000	1.2	10500	1.75
0.85	15200	1.2	1678	"	"	42800	120000	1.1	11400	1.6
0.75	17300	1.05	1867	"	"	42800	120000	0.9	14100	1.3
0.65	18500*	1.0	2154	"	"	42800	120000	0.8	18500*	1.0

P = 2.2 kW

185	113	1.35	7.58	BF10-../D09XA4	40	2200	-	225	93	1.65
145	144	1.25	9.69	"	"	2350	-	174	120	1.5
119	176	1.05	11.84	"	"	2500	-	142	147	1.25
94	220	0.83	15.04	"	"	2800	-	112	187	0.98
77	270	0.89	18.23	"	"	2900	-	93	225	1.05
70	300	0.8	20.05	"	"	3000	-	84	250	0.96
175	120	1.85	8.00	BF20-../D09XA4	47	2850	-	210	100	2.2
134	156	1.65	10.51	"	"	3100	-	160	131	1.95
107	196	1.45	13.18	"	"	3300	-	128	164	1.75
91	230	1.35	15.54	"	"	3450	-	109	192	1.6
84	250	1.45	16.77	"	"	3500	-	101	205	1.75
76	275	1.35	18.45	"	"	3600	-	92	225	1.65
64	325	1.2	22.04	"	"	3800	-	77	270	1.45
58	360	1.1	24.25	"	"	3950	-	70	300	1.35
51	410	1.0	27.62	"	"	4150	-	61	340	1.25
46.5	450	0.93	30.40	"	"	4400	-	56	375	1.1
43	485	0.87	32.58	"	"	4450	-	52	400	1.05
174	120	2.4	8.07	BF30-../D09XA4	57	2650	-	210	100	2.9
141	149	2.1	9.99	"	"	2850	-	169	124	2.6
109	192	1.9	12.91	"	"	3050	-	131	160	2.3
88	235	1.75	16.00	"	"	3250	-	105	200	2.0
80	260	1.85	17.65	"	"	3300	-	96	215	2.2
73	285	1.75	19.41	"	"	3400	-	87	240	2.1
65	320	1.65	21.85	"	"	3500	-	77	270	1.95
59	355	1.55	24.03	"	"	3600	-	70	300	1.85
50	420	1.35	28.23	"	"	3800	-	60	350	1.65
45.5	460	1.25	31.05	"	"	4000	-	55	380	1.5
40	520	1.1	35.00	"	"	4200	-	48	435	1.3
36.5	570	1.0	38.49	"	"	4400	-	44	475	1.2
34.5	600	0.96	41.01	"	"	4500	-	41	510	1.15
31.5	660	0.87	45.10	"	"	4700	-	37.5	560	1.05
184	114	3.2	7.62	BF40-../D09XA4	66	3900	-	225	93	4.0
148	141	2.9	9.48	"	"	4150	-	178	118	3.5
119	176	2.6	11.79	"	"	4450	-	143	146	3.2
94	220	2.4	15.02	"	"	4800	-	112	187	2.8
81	255	2.5	17.35	"	"	4950	-	97	215	3.0
74	280	2.4	19.09	"	"	5100	-	89	235	2.8
65	320	2.2	21.60	"	"	5200	-	78	265	2.7
59	355	2.1	23.77	"	"	5400	-	71	295	2.5
53	395	1.95	26.86	"	"	5600	-	63	330	2.3

P = 2.2 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
47.5	440	1.85	29.55	BF40-../D09XA4	66	5800	-	57	365	2.2
41	510	1.7	34.21	"	"	6000	-	49.5	420	2.0
37.5	560	1.6	37.64	"	"	6200	-	45	465	1.9
34	610	1.5	41.42	"	"	6500	-	41	510	1.75
31	670	1.35	45.56	"	"	6800	-	37	560	1.6
29	720	1.25	48.92	"	"	7000	-	34.5	600	1.5
26.5	790	1.15	53.82	"	"	7200	-	31.5	660	1.35
23	910	0.99	61.25	"	"	7600	-	27.5	760	1.2
21	1000	0.9	67.38	"	"	8000	-	25	840	1.05
20	1050	0.86	71.40	"	"	8100	-	24	870	1.05
61	340	3.3	23.14	BF50-../D09XA4	95	6800	-	73	285	3.9
55	380	3.1	25.88	"	"	7100	-	65	320	3.6
44.5	470	2.7	31.73	"	"	7500	-	53	395	3.2
39.5	530	2.5	35.49	"	"	7800	-	47.5	440	3.0
33.5	620	2.1	42.15	"	"	8500	-	40	520	2.5
30	700	1.85	47.14	"	"	8900	-	36	580	2.2
25	840	1.55	56.86	"	"	9300	-	30	700	1.85
22.5	930	1.4	63.59	"	"	9800	-	26.5	790	1.65
19.5	1070	1.2	72.72	"	"	10700	-	23.5	890	1.45
17.5	1200	1.1	81.33	"	"	11300	-	21	1000	1.3
16	1310	0.99	90.24	"	"	11800	-	19	1100	1.2
14	1500	0.87	100.9	"	"	12300	-	17	1230	1.05
30.5	680	3.3	46.16	BF60-../D09XA4	124	9900	28000	36.5	570	3.9
26	800	2.9	54.44	"	"	10500	29700	31	670	3.4
23.5	890	2.6	60.40	"	"	11100	31400	28	750	3.1
19.5	1070	2.1	72.15	"	"	12000	34000	23.5	890	2.6
17.5	1200	1.9	80.05	"	"	12600	35600	21	1000	2.3
15	1400	1.65	93.44	"	"	13500	38200	18	1160	2.0
14	1500	1.55	103.7	"	"	14100	39900	16.5	1270	1.8
12.5	1680	1.35	113.1	"	"	14600	41300	15	1400	1.65
11.5	1820	1.25	125.5	"	"	15300	43300	13.5	1550	1.5
10	2100	1.1	140.8	BF60Z-../D09XA4	143	15300	43300	12	1750	1.3
8.3	2500	0.92	169.2	"	"	15300	43300	10	2100	1.1
7.5	2800	0.82	187.7	"	"	15300	43300	9.0	2300	1.0
11.5	1820	2.9	122.7	BF70-../D09XA4	210	16100	47700	14	1500	3.5
11	1910	2.7	133.0	BF70Z-../D09XA4	231	16100	47700	13	1610	3.2
9.1	2300	2.3	154.0	"	"	16100	47700	11	1910	2.7
7.8	2650	1.95	179.7	"	"	16100	47700	9.4	2200	2.4
7.1	2950	1.75	199.7	"	"	16100	47700	8.5	2450	2.1
6.1	3400	1.55	233.0	"	"	16100	47700	7.3	2850	1.8
5.5	3800	1.35	258.7	"	"	16100	47700	6.5	3200	1.65
4.7	4450	1.15	301.8	"	"	16100	47700	5.6	3750	1.4
4.1	5100	1.0	341.7	"	"	16100	47700	5.0	4200	1.25
3.6	5800	0.9	398.7	"	"	16100	47700	4.3	4850	1.05
3.2	6500	0.8	439.2	"	"	16100	47700	3.9	5300	0.98
6.7	3100	3.1	209.4	BF80-../D09XA4	307	34300	75000	8.1	2550	3.7
6.0	3500	2.7	237.1	"	"	36900	75000	7.1	2950	3.2
5.3	3950	2.4	269.1	"	"	39600	75000	6.3	3300	2.9
4.8	4350	2.4	291.7	BF80Z-../D09XA4	348	39600	75000	5.8	3600	2.9
4.1	5100	2.1	347.3	"	"	39600	75000	4.9	4250	2.5
3.6	5800	1.8	394.2	"	"	39600	75000	4.3	4850	2.2
3.2	6500	1.6	450.4	"	"	39600	75000	3.8	5500	1.9
2.8	7500	1.4	511.2	"	"	39600	75000	3.3	6300	1.65
2.4	8700	1.2	583.4	"	"	39600	75000	2.9	7200	1.45
2.2	9500	1.1	662.1	"	"	39600	75000	2.6	8000	1.3
1.9	11000	0.95	770.6	"	"	39600	75000	2.2	9500	1.1
1.7	12300	0.85	874.6	"	"	39600	75000	2.0	10500	1.0
3.7	5600	3.3	382.6	BF90Z-../D09XA4	612	42800	120000	4.4	4750	3.9
3.1	6700	2.8	456.7	"	"	42800	120000	3.7	5600	3.3
2.8	7500	2.5	508.5	"	"	42800	120000	3.4	6100	3.0
2.4	8700	2.1	591.1	"	"	42800	120000	2.9	7200	2.6



P = 2.2 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
2.2	9500	1.95	658.1	BF90Z-../D09XA4	612	42800	120000	2.6	8000	2.3
1.9	11000	1.7	759.0	"	"	42800	120000	2.3	9100	2.0
1.7	12300	1.5	845.1	"	"	42800	120000	2.0	10500	1.75
1.5	12400	1.5	976.1	BF90G50-../D09XA4	624	42800	120000	1.8	10000	1.85
1.2	15800	1.15	1204	"	"	42800	120000	1.4	13300	1.4
1.0	19600	0.94	1444	"	"	42800	120000	1.2	16100	1.15
0.85	18500*	1.0	1678	"	"	42800	120000	1.1	18500*	1.0

P = 3.0 kW

187	153	2.4	7.62	BF40-../D11SA4	74	3900	-	225	127	2.9
150	191	2.2	9.48	"	"	4150	-	181	158	2.6
121	235	2.0	11.79	"	"	4450	-	146	196	2.4
95	300	1.75	15.02	"	"	4800	-	114	250	2.1
82	345	1.85	17.35	"	"	4950	-	99	285	2.2
75	380	1.75	19.09	"	"	5100	-	90	315	2.1
66	430	1.65	21.60	"	"	5200	-	80	355	2.0
60	475	1.55	23.77	"	"	5400	-	72	395	1.85
53	540	1.45	26.86	"	"	5600	-	64	445	1.75
48.5	590	1.35	29.55	"	"	5800	-	58	490	1.65
42	680	1.25	34.21	"	"	6000	-	50	570	1.5
38	750	1.2	37.64	"	"	6200	-	45.5	620	1.45
34.5	830	1.1	41.42	"	"	6500	-	41.5	690	1.3
31.5	900	1.0	45.56	"	"	6800	-	38	750	1.2
29.5	970	0.93	48.92	"	"	7000	-	35	810	1.1
26.5	1080	0.83	53.82	"	"	7200	-	32	890	1.0
133	215	3.1	10.68	BF50-../D11SA4	104	5600	-	161	177	3.8
97	295	2.7	14.65	"	"	6100	-	117	240	3.3
86	330	2.9	16.70	"	"	6200	-	103	275	3.5
77	370	2.7	18.68	"	"	6400	-	92	310	3.2
62	460	2.4	23.14	"	"	6800	-	74	385	2.9
55	520	2.2	25.88	"	"	7100	-	67	425	2.7
45	630	2.0	31.73	"	"	7500	-	54	530	2.4
40.5	700	1.85	35.49	"	"	7800	-	48.5	590	2.2
34	840	1.55	42.15	"	"	8500	-	41	690	1.9
30.5	930	1.4	47.14	"	"	8900	-	36.5	780	1.65
25	1140	1.15	56.86	"	"	9300	-	30.5	930	1.4
22.5	1270	1.0	63.59	"	"	9800	-	27	1060	1.25
20	1430	0.91	72.72	"	"	10700	-	24	1190	1.1
17.5	1630	0.8	81.33	"	"	11300	-	21.5	1330	0.98
46	620	3.1	31.20	BF60-../D11SA4	135	8800	24900	55	520	3.7
41.5	690	2.9	34.62	"	"	9100	25700	49.5	570	3.5
34.5	830	2.6	41.60	"	"	9600	27100	41.5	690	3.1
31	920	2.4	46.16	"	"	9900	28000	37.5	760	2.9
26.5	1080	2.1	54.44	"	"	10500	29700	31.5	900	2.6
24	1190	1.95	60.40	"	"	11100	31400	28.5	1000	2.3
20	1430	1.6	72.15	"	"	12000	34000	24	1190	1.95
18	1590	1.45	80.05	"	"	12600	35600	21.5	1330	1.75
15.5	1840	1.25	93.44	"	"	13500	38200	18.5	1540	1.5
14	2000	1.15	103.7	"	"	14100	39900	16.5	1730	1.35
13	2200	1.05	113.1	"	"	14600	41300	15.5	1840	1.25
11.5	2450	0.94	125.5	"	"	15300	43300	14	2000	1.15
10.5	2700	0.85	140.8	BF60Z-../D11SA4	151	15300	43300	12.5	2250	1.0
17.5	1630	3.2	81.82	BF70-../D11SA4	214	12800	41300	21	1360	3.8
15	1910	2.7	95.46	"	"	14000	43700	18	1590	3.3
13.5	2100	2.5	105.2	"	"	14700	45100	16.5	1730	3.0
12	2350	2.2	122.7	"	"	16100	47700	14	2000	2.6
11	2600	2.0	133.0	BF70Z-../D11SA4	241	16100	47700	13	2200	2.4
9.3	3050	1.7	154.0	"	"	16100	47700	11.5	2450	2.1
8.0	3550	1.45	179.7	"	"	16100	47700	9.6	2950	1.75
7.2	3950	1.3	199.7	"	"	16100	47700	8.6	3300	1.6
6.1	4650	1.1	233.0	"	"	16100	47700	7.4	3850	1.35
5.5	5200	1.0	258.7	"	"	16100	47700	6.7	4250	1.2

P = 3.0 kW




50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
4.8	5900	0.88	301.8	BF70Z-../D11SA4	241	16100	47700	5.7	5000	1.05
9.0	3150	3.0	158.5	BF80-../D11SA4	311	29000	75000	11	2600	3.7
7.7	3700	2.6	184.5	"	"	31800	75000	9.3	3050	3.1
6.8	4200	2.3	209.4	"	"	34300	75000	8.2	3450	2.8
6.0	4750	2.0	237.1	"	"	36900	75000	7.3	3900	2.4
5.3	5400	1.75	269.1	"	"	39600	75000	6.4	4450	2.1
4.9	5800	1.8	291.7	BF80Z-../D11SA4	357	39600	75000	5.9	4850	2.2
4.1	6900	1.5	347.3	"	"	39600	75000	5.0	5700	1.85
3.7	7700	1.35	394.2	"	"	39600	75000	4.4	6500	1.6
3.2	8900	1.2	450.4	"	"	39600	75000	3.8	7500	1.4
2.8	10200	1.05	511.2	"	"	39600	75000	3.4	8400	1.25
2.5	11400	0.92	583.4	"	"	39600	75000	3.0	9500	1.1
2.2	13000	0.81	662.1	"	"	39600	75000	2.6	11000	0.95
5.5	5200	3.2	259.0	BF90-../D11SA4	563	42800	120000	6.7	4250	4.0
4.8	5900	3.1	300.4	BF90Z-../D11SA4	623	42800	120000	5.7	5000	3.7
4.2	6800	2.7	343.6	"	"	42800	120000	5.0	5700	3.2
3.8	7500	2.5	382.6	"	"	42800	120000	4.5	6300	2.9
3.2	8900	2.1	456.7	"	"	42800	120000	3.8	7500	2.5
2.8	10200	1.8	508.5	"	"	42800	120000	3.4	8400	2.2
2.5	11400	1.6	591.1	"	"	42800	120000	2.9	9800	1.9
2.2	13000	1.4	658.1	"	"	42800	120000	2.6	11000	1.7
1.9	15000	1.25	759.0	"	"	42800	120000	2.3	12400	1.5
1.7	16800	1.1	845.1	"	"	42800	120000	2.1	13600	1.35
1.5	17500	1.05	976.1	BF90G50-../D11SA4	633	42800	120000	1.8	14300	1.3
1.2	22200	0.83	1204	"	"	42800	120000	1.5	17400	1.05

P = 4.0 kW

187	200	1.85	7.62	BF40-../D11MA4	80	3900	-	225	169	2.2
150	250	1.65	9.48	"	"	4150	-	181	210	2.0
121	315	1.5	11.79	"	"	4450	-	146	260	1.8
95	400	1.3	15.02	"	"	4800	-	114	335	1.55
82	465	1.35	17.35	"	"	4950	-	99	385	1.65
75	500	1.35	19.09	"	"	5100	-	90	420	1.6
66	570	1.25	21.60	"	"	5200	-	80	475	1.5
60	630	1.15	23.77	"	"	5400	-	72	530	1.4
53	720	1.1	26.86	"	"	5600	-	64	590	1.3
48.5	780	1.05	29.55	"	"	5800	-	58	650	1.25
42	900	0.95	34.21	"	"	6000	-	50	760	1.15
38	1000	0.89	37.64	"	"	6200	-	45.5	830	1.1
34.5	1100	0.82	41.42	"	"	6500	-	41.5	920	0.98
185	205	2.8	7.71	BF50-../D11MA4	110	5100	-	225	169	3.3
133	285	2.4	10.68	"	"	5600	-	161	235	2.9
97	390	2.0	14.65	"	"	6100	-	117	325	2.4
86	440	2.2	16.70	"	"	6200	-	103	370	2.6
77	495	2.0	18.68	"	"	6400	-	92	415	2.4
62	610	1.8	23.14	"	"	6800	-	74	510	2.2
55	690	1.7	25.88	"	"	7100	-	67	570	2.0
45	840	1.5	31.73	"	"	7500	-	54	700	1.8
40.5	940	1.4	35.49	"	"	7800	-	48.5	780	1.65
34	1120	1.15	42.15	"	"	8500	-	41	930	1.4
30.5	1250	1.05	47.14	"	"	8900	-	36.5	1040	1.25
25	1520	0.86	56.86	"	"	9300	-	30.5	1250	1.05
100	380	3.1	14.24	BF60-../D11MA4	141	7100	20000	121	315	3.8
84	450	3.2	16.96	"	"	7300	20600	101	375	3.9
76	500	3.0	18.81	"	"	7600	21500	91	415	3.7
63	600	2.8	22.58	"	"	8000	22600	76	500	3.3
57	670	2.6	25.05	"	"	8200	23200	69	550	3.2
46	830	2.3	31.20	"	"	8800	24900	55	690	2.8
41.5	920	2.2	34.62	"	"	9100	25700	49.5	770	2.6
34.5	1100	1.95	41.60	"	"	9600	27100	41.5	920	2.3

P = 4.0 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
31	1230	1.8	46.16	BF60-../D11MA4	141	9900	28000	37.5	1010	2.2
26.5	1440	1.6	54.44	"	"	10500	29700	31.5	1210	1.9
24	1590	1.45	60.40	"	"	11100	31400	28.5	1340	1.7
20	1910	1.2	72.15	"	"	12000	34000	24	1590	1.45
18	2100	1.1	80.05	"	"	12600	35600	21.5	1770	1.3
15.5	2450	0.94	93.44	"	"	13500	38200	18.5	2050	1.1
14	2700	0.85	103.7	"	"	14100	39900	16.5	2300	1.0
23	1660	3.1	61.94	BF70-../D11MA4	220	10800	37400	28	1360	3.8
20	1910	2.7	72.26	"	"	12000	39600	24	1590	3.3
17.5	2150	2.4	81.82	"	"	12800	41300	21	1810	2.9
15	2500	2.1	95.46	"	"	14000	43700	18	2100	2.5
13.5	2800	1.85	105.2	"	"	14700	45100	16.5	2300	2.3
12	3150	1.65	122.7	"	"	16100	47700	14	2700	1.95
11	3450	1.5	133.0	BF70Z-../D11MA4	247	16100	47700	13	2900	1.8
9.3	4100	1.25	154.0	"	"	16100	47700	11.5	3300	1.6
8.0	4750	1.1	179.7	"	"	16100	47700	9.6	3950	1.3
7.2	5300	0.98	199.7	"	"	16100	47700	8.6	4400	1.2
6.1	6200	0.84	233.0	"	"	16100	47700	7.4	5100	1.0
12	3150	3.0	122.4	BF80-../D11MA4	317	24500	75000	14	2700	3.5
10.5	3600	2.6	139.7	"	"	26700	75000	12.5	3050	3.1
9.0	4200	2.3	158.5	"	"	29000	75000	11	3450	2.8
7.7	4950	1.9	184.5	"	"	31800	75000	9.3	4100	2.3
6.8	5600	1.7	209.4	"	"	34300	75000	8.2	4650	2.0
6.0	6300	1.5	237.1	"	"	36900	75000	7.3	5200	1.85
5.3	7200	1.3	269.1	"	"	39600	75000	6.4	5900	1.6
4.9	7700	1.35	291.7	BF80Z-../D11MA4	363	39600	75000	5.9	6400	1.65
4.1	9300	1.15	347.3	"	"	39600	75000	5.0	7600	1.4
3.7	10300	1.0	394.2	"	"	39600	75000	4.4	8600	1.2
3.2	11900	0.88	450.4	"	"	39600	75000	3.8	10000	1.05
7.2	5300	3.2	198.8	BF90-../D11MA4	569	36000	111300	8.7	4350	3.9
6.2	6100	2.8	232.6	"	"	39900	118300	7.4	5100	3.3
5.5	6900	2.4	259.0	"	"	42800	120000	6.7	5700	2.9
5.3	7200	2.6	269.8	BF90Z-../D11MA4	629	42800	120000	6.4	5900	3.1
4.8	7900	2.3	300.4	"	"	42800	120000	5.7	6700	2.8
4.2	9000	2.1	343.6	"	"	42800	120000	5.0	7600	2.4
3.8	10000	1.85	382.6	"	"	42800	120000	4.5	8400	2.2
3.2	11900	1.55	456.7	"	"	42800	120000	3.8	10000	1.85
2.8	13600	1.35	508.5	"	"	42800	120000	3.4	11200	1.65
2.5	15200	1.2	591.1	"	"	42800	120000	2.9	13100	1.4
2.2	17300	1.05	658.1	"	"	42800	120000	2.6	14600	1.25
1.9	20100	0.92	759.0	"	"	42800	120000	2.3	16600	1.1
1.7	22400	0.83	845.1	"	"	42800	120000	2.1	18100	1.0

P = 5.5 kW

187	280	1.3	7.62	BF40-../D11LA4	92	3900	-	225	230	1.6
150	350	1.2	9.48	"	"	4150	-	181	290	1.45
121	430	1.1	11.79	"	"	4450	-	146	355	1.3
95	550	0.95	15.02	"	"	4800	-	114	460	1.15
82	640	0.99	17.35	"	"	4950	-	99	530	1.2
75	700	0.95	19.09	"	"	5100	-	90	580	1.15
66	790	0.89	21.60	"	"	5200	-	80	650	1.1
60	870	0.85	23.77	"	"	5400	-	72	720	1.0
185	280	2.0	7.71	BF50-../D11LA4	122	5100	-	225	230	2.5
133	390	1.75	10.68	"	"	5600	-	161	325	2.1
97	540	1.45	14.65	"	"	6100	-	117	445	1.8
86	610	1.55	16.70	"	"	6200	-	103	500	1.9
77	680	1.5	18.68	"	"	6400	-	92	570	1.75
62	840	1.3	23.14	"	"	6800	-	74	700	1.6
55	950	1.25	25.88	"	"	7100	-	67	780	1.5
45	1160	1.1	31.73	"	"	7500	-	54	970	1.3
40.5	1290	1.0	35.49	"	"	7800	-	48.5	1080	1.2

P = 5.5 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
34	1540	0.84	42.15	BF50-../D11LA4	122	8500	-	41	1280	1.0
184	285	3.0	7.74	BF60-../D11LA4	153	6000	16900	225	230	3.8
138	380	2.7	10.31	"	"	6500	18400	166	315	3.2
100	520	2.3	14.24	"	"	7100	20000	121	430	2.8
84	620	2.3	16.96	"	"	7300	20600	101	520	2.8
76	690	2.2	18.81	"	"	7600	21500	91	570	2.7
63	830	2.0	22.58	"	"	8000	22600	76	690	2.4
57	920	1.9	25.05	"	"	8200	23200	69	760	2.3
46	1140	1.65	31.20	"	"	8800	24900	55	950	2.0
41.5	1260	1.6	34.62	"	"	9100	25700	49.5	1060	1.85
34.5	1520	1.4	41.60	"	"	9600	27100	41.5	1260	1.7
31	1690	1.3	46.16	"	"	9900	28000	37.5	1400	1.6
26.5	1980	1.15	54.44	"	"	10500	29700	31.5	1660	1.4
24	2150	1.05	60.40	"	"	11100	31400	28.5	1840	1.25
20	2600	0.88	72.15	"	"	12000	34000	24	2150	1.05
33.5	1560	3.3	43.02	BF70-../D11LA4	232	8700	32800	40	1310	4.0
30	1750	3.0	47.82	"	"	9100	34000	36	1450	3.6
25.5	2050	2.5	55.79	"	"	10200	36000	31	1690	3.1
23	2250	2.3	61.94	"	"	10800	37400	28	1870	2.8
20	2600	2.0	72.26	"	"	12000	39600	24	2150	2.4
17.5	3000	1.75	81.82	"	"	12800	41300	21	2500	2.1
15	3500	1.5	95.46	"	"	14000	43700	18	2900	1.8
13.5	3850	1.35	105.2	"	"	14700	45100	16.5	3150	1.65
12	4350	1.2	122.7	"	"	16100	47700	14	3750	1.4
11	4750	1.1	133.0	BF70Z-../D11LA4	258	16100	47700	13	4000	1.3
9.3	5600	0.93	154.0	"	"	16100	47700	11.5	4550	1.15
8.0	6500	0.8	179.7	"	"	16100	47700	9.6	5400	0.96
17.5	3000	3.2	83.16	BF80-../D11LA4	328	18400	65100	21	2500	3.8
15.5	3350	2.8	94.38	"	"	20300	68500	18.5	2800	3.4
13.5	3850	2.5	107.9	"	"	22400	72300	16	3250	2.9
12	4350	2.2	122.4	"	"	24500	75000	14	3750	2.5
10.5	5000	1.9	139.7	"	"	26700	75000	12.5	4200	2.3
9.0	5800	1.65	158.5	"	"	29000	75000	11	4750	2.0
7.7	6800	1.4	184.5	"	"	31800	75000	9.3	5600	1.7
6.8	7700	1.25	209.4	"	"	34300	75000	8.2	6400	1.5
6.0	8700	1.1	237.1	"	"	36900	75000	7.3	7100	1.35
5.3	9900	0.96	269.1	"	"	39600	75000	6.4	8200	1.15
4.9	10700	0.98	291.7	BF80Z-../D11LA4	375	39600	75000	5.9	8900	1.2
4.1	12800	0.82	347.3	"	"	39600	75000	5.0	10500	1.0
9.2	5700	2.9	154.8	BF90-../D11LA4	581	30100	100800	11.5	4550	3.7
8.0	6500	2.6	178.6	"	"	33400	106700	9.6	5400	3.1
7.2	7200	2.3	198.8	"	"	36000	111300	8.7	6000	2.8
6.2	8400	2.0	232.6	"	"	39900	118300	7.4	7000	2.4
5.5	9500	1.75	259.0	"	"	42800	120000	6.7	7800	2.2
5.3	9900	1.85	269.8	BF90Z-../D11LA4	641	42800	120000	6.4	8200	2.3
4.8	10900	1.7	300.4	"	"	42800	120000	5.7	9200	2.0
4.2	12500	1.5	343.6	"	"	42800	120000	5.0	10500	1.75
3.8	13800	1.35	382.6	"	"	42800	120000	4.5	11600	1.6
3.2	16400	1.15	456.7	"	"	42800	120000	3.8	13800	1.35
2.8	18700	0.99	508.5	"	"	42800	120000	3.4	15400	1.2
2.5	21000	0.88	591.1	"	"	42800	120000	2.9	18100	1.0

P = 7.5 kW

185	385	1.45	7.71	BF50-../D13MA4	133	5100	-	225	315	1.8
133	530	1.3	10.68	"	"	5600	-	161	440	1.55
97	730	1.1	14.65	"	"	6100	-	117	610	1.3
86	830	1.15	16.70	"	"	6200	-	103	690	1.4
77	930	1.1	18.68	"	"	6400	-	92	770	1.3
62	1150	0.96	23.14	"	"	6800	-	74	960	1.15
55	1300	0.9	25.88	"	"	7100	-	67	1060	1.1
45	1590	0.8	31.73	"	"	7500	-	54	1320	0.96

P = 7.5 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
184	385	2.3	7.74	BF60-../D13MA4	166	6000	16900	225	315	2.8
138	510	2.0	10.31	"	"	6500	18400	166	430	2.4
100	710	1.7	14.24	"	"	7100	20000	121	590	2.0
84	850	1.7	16.96	"	"	7300	20600	101	700	2.1
76	940	1.6	18.81	"	"	7600	21500	91	780	1.95
63	1130	1.45	22.58	"	"	8000	22600	76	940	1.75
57	1250	1.4	25.05	"	"	8200	23200	69	1030	1.7
46	1550	1.25	31.20	"	"	8800	24900	55	1300	1.45
41.5	1720	1.15	34.62	"	"	9100	25700	49.5	1440	1.4
34.5	2050	1.05	41.60	"	"	9600	27100	41.5	1720	1.25
31	2300	0.97	46.16	"	"	9900	28000	37.5	1910	1.15
26.5	2700	0.85	54.44	"	"	10500	29700	31.5	2250	1.0
45	1590	3.3	31.84	BF70-../D13MA4	245	7700	30000	54	1320	3.9
39	1830	2.8	36.88	"	"	7900	31100	46.5	1540	3.4
33.5	2100	2.5	43.02	"	"	8700	32800	40	1790	2.9
30	2350	2.2	47.82	"	"	9100	34000	36	1980	2.6
25.5	2800	1.85	55.79	"	"	10200	36000	31	2300	2.3
23	3100	1.7	61.94	"	"	10800	37400	28	2550	2.0
20	3550	1.45	72.26	"	"	12000	39600	24	2950	1.75
17.5	4050	1.3	81.82	"	"	12800	41300	21	3400	1.55
15	4750	1.1	95.46	"	"	14000	43700	18	3950	1.3
13.5	5300	0.98	105.2	"	"	14700	45100	16.5	4300	1.2
12	5900	0.88	122.7	"	"	16100	47700	14	5100	1.0
11	6500	0.8	133.0	BF70Z-../D13MA4	270	16100	47700	13	5500	0.95
26.5	2700	3.3	53.86	BF80-../D13MA4	341	14000	55800	32	2200	4.1
23.5	3000	3.1	61.55	"	"	14800	58100	28	2550	3.6
20.5	3450	2.8	69.86	"	"	15900	60600	24.5	2900	3.3
17.5	4050	2.3	83.16	"	"	18400	65100	21	3400	2.8
15.5	4600	2.1	94.38	"	"	20300	68500	18.5	3850	2.5
13.5	5300	1.8	107.9	"	"	22400	72300	16	4450	2.1
12	5900	1.6	122.4	"	"	24500	75000	14	5100	1.85
10.5	6800	1.4	139.7	"	"	26700	75000	12.5	5700	1.65
9.0	7900	1.2	158.5	"	"	29000	75000	11	6500	1.45
7.7	9300	1.0	184.5	"	"	31800	75000	9.3	7700	1.25
6.8	10500	0.9	209.4	"	"	34300	75000	8.2	8700	1.1
6.0	11900	0.8	237.1	"	"	36900	75000	7.3	9800	0.97
13.5	5300	3.2	107.5	BF90-../D13MA4	593	22300	86900	16	4450	3.8
12	5900	2.8	119.7	"	"	24500	90800	14.5	4900	3.4
10.5	6800	2.5	139.1	"	"	27700	96300	12.5	5700	2.9
9.2	7700	2.2	154.8	"	"	30100	100800	11.5	6200	2.7
8.0	8900	1.9	178.6	"	"	33400	106700	9.6	7400	2.3
7.2	9900	1.7	198.8	"	"	36000	111300	8.7	8200	2.0
6.2	11500	1.45	232.6	"	"	39900	118300	7.4	9600	1.75
5.5	13000	1.3	259.0	"	"	42800	120000	6.7	10600	1.6
5.3	13500	1.35	269.8	BF90Z-../D13MA4	654	42800	120000	6.4	11100	1.65
4.8	14900	1.25	300.4	"	"	42800	120000	5.7	12500	1.5
4.2	17000	1.1	343.6	"	"	42800	120000	5.0	14300	1.3
3.8	18800	0.98	382.6	"	"	42800	120000	4.5	15900	1.15
3.2	22300	0.83	456.7	"	"	42800	120000	3.8	18800	0.98

P = 9.5 kW

185	490	1.15	7.71	BF50-../D13LA4	136	5100	-	225	400	1.4
133	680	0.99	10.68	"	"	5600	-	161	560	1.2
97	930	0.85	14.65	"	"	6100	-	117	770	1.05
86	1050	0.9	16.70	"	"	6200	-	103	880	1.1
77	1170	0.86	18.68	"	"	6400	-	92	980	1.0
184	490	1.75	7.74	BF60-../D13LA4	169	6000	16900	225	400	2.2
138	650	1.55	10.31	"	"	6500	18400	166	540	1.9
100	900	1.3	14.24	"	"	7100	20000	121	740	1.6
84	1080	1.35	16.96	"	"	7300	20600	101	890	1.65
76	1190	1.3	18.81	"	"	7600	21500	91	990	1.55

P = 9.5 kW




50 Hz			i	Type	m	F _{RN}	F _{RV}	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
63	1440	1.15	22.58	BF60-../D13LA4	169	8000	22600	76	1190	1.4
57	1590	1.1	25.05	"	"	8200	23200	69	1310	1.3
46	1970	0.96	31.20	"	"	8800	24900	55	1640	1.15
41.5	2150	0.92	34.62	"	"	9100	25700	49.5	1830	1.1
34.5	2600	0.82	41.60	"	"	9600	27100	41.5	2150	0.99
58	1560	3.2	24.55	BF70-../D13LA4	248	7000	27700	70	1290	3.9
53	1710	3.0	27.29	"	"	7000	28400	63	1440	3.6
45	2000	2.6	31.84	"	"	7700	30000	54	1680	3.1
39	2300	2.3	36.88	"	"	7900	31100	46.5	1950	2.7
33.5	2700	1.95	43.02	"	"	8700	32800	40	2250	2.3
30	3000	1.75	47.82	"	"	9100	34000	36	2500	2.1
25.5	3550	1.45	55.79	"	"	10200	36000	31	2900	1.8
23	3900	1.35	61.94	"	"	10800	37400	28	3200	1.65
20	4500	1.15	72.26	"	"	12000	39600	24	3750	1.4
17.5	5100	1.0	81.82	"	"	12800	41300	21	4300	1.2
15	6000	0.87	95.46	"	"	14000	43700	18	5000	1.05
30	3000	2.9	47.46	BF80-../D13LA4	344	13400	53700	36.5	2450	3.5
26.5	3400	2.6	53.86	"	"	14000	55800	32	2800	3.2
23.5	3850	2.4	61.55	"	"	14800	58100	28	3200	2.9
20.5	4400	2.2	69.86	"	"	15900	60600	24.5	3700	2.6
17.5	5100	1.85	83.16	"	"	18400	65100	21	4300	2.2
15.5	5800	1.65	94.38	"	"	20300	68500	18.5	4900	1.95
13.5	6700	1.4	107.9	"	"	22400	72300	16	5600	1.7
12	7500	1.25	122.4	"	"	24500	75000	14	6400	1.5
10.5	8600	1.1	139.7	"	"	26700	75000	12.5	7200	1.3
9.0	10000	0.95	158.5	"	"	29000	75000	11	8200	1.15
7.7	11700	0.81	184.5	"	"	31800	75000	9.3	9700	0.98
18	5000	3.3	80.85	BF90-../D13LA4	596	17500	77500	21.5	4200	3.9
16	5600	3.0	90.02	"	"	18900	80600	19	4750	3.5
13.5	6700	2.5	107.5	"	"	22300	86900	16	5600	3.0
12	7500	2.2	119.7	"	"	24500	90800	14.5	6200	2.7
10.5	8600	1.95	139.1	"	"	27700	96300	12.5	7200	2.3
9.2	9800	1.7	154.8	"	"	30100	100800	11.5	7800	2.2
8.0	11300	1.5	178.6	"	"	33400	106700	9.6	9400	1.8
7.2	12600	1.35	198.8	"	"	36000	111300	8.7	10400	1.6
6.2	14600	1.15	232.6	"	"	39900	118300	7.4	12200	1.4
5.5	16400	1.0	259.0	"	"	42800	120000	6.7	13500	1.25
5.3	17100	1.1	269.8	BF90Z-../D13LA4	657	42800	120000	6.4	14100	1.3
4.8	18900	0.98	300.4	"	"	42800	120000	5.7	15900	1.15
4.2	21600	0.86	343.6	"	"	42800	120000	5.0	18100	1.0

P = 11 kW

190	550	1.05	7.71	BF50-../D16MA4	181	5100	-	230	455	1.25
137	760	0.89	10.68	"	"	5600	-	165	630	1.05
88	1190	0.8	16.70	"	"	6200	-	106	990	0.96
189	550	1.6	7.74	BF60-../D16MA4	214	6000	16900	230	455	1.9
142	730	1.4	10.31	"	"	6500	18400	171	610	1.65
103	1010	1.2	14.24	"	"	7100	20000	124	840	1.4
87	1200	1.2	16.96	"	"	7300	20600	104	1010	1.45
78	1340	1.15	18.81	"	"	7600	21500	94	1110	1.35
65	1610	1.05	22.58	"	"	8000	22600	78	1340	1.25
59	1780	0.97	25.05	"	"	8200	23200	71	1470	1.2
47	2200	0.86	31.20	"	"	8800	24900	57	1840	1.05
42.5	2450	0.81	34.62	"	"	9100	25700	51	2050	0.97
70	1500	3.1	21.04	BF70-../D16MA4	297	6400	26300	84	1250	3.7
60	1750	2.9	24.55	"	"	7000	27700	72	1450	3.5
54	1940	2.7	27.29	"	"	7000	28400	65	1610	3.2
46	2250	2.3	31.84	"	"	7700	30000	56	1870	2.8
40	2600	2.0	36.88	"	"	7900	31100	48	2150	2.4
34	3050	1.7	43.02	"	"	8700	32800	41	2550	2.0

P = 11 kW




Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
31	3350	1.55	47.82	BF70-../D16MA4	297	9100	34000	37	2800	1.85
26.5	3950	1.3	55.79	"	"	10200	36000	32	3250	1.6
24	4350	1.2	61.94	"	"	10800	37400	28.5	3650	1.4
20.5	5100	1.0	72.26	"	"	12000	39600	24.5	4250	1.2
18	5800	0.9	81.82	"	"	12800	41300	22	4750	1.1
48.5	2150	3.3	30.21	BF80-../D16MA4	393	12300	47900	59	1780	4.0
43.5	2400	3.2	33.61	"	"	11700	48400	53	1980	3.9
38.5	2700	3.0	38.14	"	"	12200	50300	46.5	2250	3.6
31	3350	2.6	47.46	"	"	13400	53700	37.5	2800	3.1
27.5	3800	2.4	53.86	"	"	14000	55800	33	3150	2.8
24	4350	2.1	61.55	"	"	14800	58100	29	3600	2.6
21	5000	1.9	69.86	"	"	15900	60600	25.5	4100	2.3
18	5800	1.65	83.16	"	"	18400	65100	21.5	4850	1.95
15.5	6700	1.4	94.38	"	"	20300	68500	19	5500	1.75
14	7500	1.25	107.9	"	"	22400	72300	16.5	6300	1.5
12	8700	1.1	122.4	"	"	24500	75000	14.5	7200	1.3
10.5	10000	0.95	139.7	"	"	26700	75000	13	8000	1.2
9.3	11200	0.85	158.5	"	"	29000	75000	11.5	9100	1.05
21	5000	3.2	70.69	BF90-../D16MA4	641	16800	74700	25	4200	3.8
18.5	5600	3.0	80.85	"	"	17500	77500	22	4750	3.5
16.5	6300	2.7	90.02	"	"	18900	80600	20	5200	3.2
14	7500	2.2	107.5	"	"	22300	86900	16.5	6300	2.7
12.5	8400	2.0	119.7	"	"	24500	90800	15	7000	2.4
10.5	10000	1.7	139.1	"	"	27700	96300	13	8000	2.1
9.5	11000	1.55	154.8	"	"	30100	100800	11.5	9100	1.85
8.2	12800	1.3	178.6	"	"	33400	106700	9.9	10600	1.6
7.4	14100	1.2	198.8	"	"	36000	111300	8.9	11800	1.4
6.3	16600	1.0	232.6	"	"	39900	118300	7.6	13800	1.2
5.7	18400	0.91	259.0	"	"	42800	120000	6.8	15400	1.1
5.5	19100	0.97	269.8	BF90Z-../D16MA4	702	42800	120000	6.6	15900	1.15
4.9	21400	0.86	300.4	"	"	42800	120000	5.9	17800	1.05

P = 15 kW

189	750	1.15	7.74	BF60-../D16LA4	227	6000	16900	230	620	1.4
142	1000	1.0	10.31	"	"	6500	18400	171	830	1.2
103	1390	0.86	14.24	"	"	7100	20000	124	1150	1.05
87	1640	0.88	16.96	"	"	7300	20600	104	1370	1.05
78	1830	0.83	18.81	"	"	7600	21500	94	1520	1.0
98	1460	2.5	14.90	BF70-../D16LA4	310	5900	24000	119	1200	3.0
84	1700	2.5	17.39	"	"	6200	25000	102	1400	3.0
70	2000	2.3	21.04	"	"	6400	26300	84	1700	2.7
60	2350	2.1	24.55	"	"	7000	27700	72	1980	2.5
54	2650	1.95	27.29	"	"	7000	28400	65	2200	2.4
46	3100	1.7	31.84	"	"	7700	30000	56	2550	2.0
40	3550	1.45	36.88	"	"	7900	31100	48	2950	1.75
34	4200	1.25	43.02	"	"	8700	32800	41	3450	1.5
31	4600	1.15	47.82	"	"	9100	34000	37	3850	1.35
26.5	5400	0.96	55.79	"	"	10200	36000	32	4450	1.15
24	5900	0.88	61.94	"	"	10800	37400	28.5	5000	1.05
89	1600	3.3	16.49	BF80-../D16LA4	406	11400	41400	107	1330	4.0
63	2250	2.8	23.29	"	"	11800	44900	76	1880	3.4
48.5	2950	2.4	30.21	"	"	12300	47900	59	2400	3.0
43.5	3250	2.4	33.61	"	"	11700	48400	53	2700	2.9
38.5	3700	2.2	38.14	"	"	12200	50300	46.5	3050	2.6
31	4600	1.85	47.46	"	"	13400	53700	37.5	3800	2.3
27.5	5200	1.7	53.86	"	"	14000	55800	33	4300	2.1
24	5900	1.6	61.55	"	"	14800	58100	29	4900	1.9
21	6800	1.4	69.86	"	"	15900	60600	25.5	5600	1.7
18	7900	1.2	83.16	"	"	18400	65100	21.5	6600	1.45
15.5	9200	1.05	94.38	"	"	20300	68500	19	7500	1.25
14	10200	0.93	107.9	"	"	22400	72300	16.5	8600	1.1

P = 15 kW



50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
12	11900	0.8	122.4	BF80-../D16LA4	406	24500	75000	14.5	9800	0.97
31.5	4500	3.1	46.43	BF90-../D16LA4	654	13800	65500	38	3750	3.8
28.5	5000	2.9	51.70	"	"	14600	67800	34.5	4150	3.5
23	6200	2.5	63.49	"	"	15800	72000	28	5100	3.0
21	6800	2.3	70.69	"	"	16800	74700	25	5700	2.8
18.5	7700	2.1	80.85	"	"	17500	77500	22	6500	2.5
16.5	8600	1.95	90.02	"	"	18900	80600	20	7100	2.4
14	10200	1.65	107.5	"	"	22300	86900	16.5	8600	1.95
12.5	11400	1.45	119.7	"	"	24500	90800	15	9500	1.75
10.5	13600	1.25	139.1	"	"	27700	96300	13	11000	1.55
9.5	15000	1.1	154.8	"	"	30100	100800	11.5	12400	1.35
8.2	17400	0.97	178.6	"	"	33400	106700	9.9	14400	1.15
7.4	19300	0.87	198.8	"	"	36000	111300	8.9	16000	1.05


P = 18.5 kW

189	930	0.93	7.74	BF60-../D16XA4	237	6000	16900	230	760	1.15
142	1240	0.82	10.31	"	"	6500	18400	171	1030	0.98
98	1800	2.0	14.90	BF70-../D16XA4	320	5900	24000	119	1480	2.5
84	2100	2.0	17.39	"	"	6200	25000	102	1730	2.5
70	2500	1.85	21.04	"	"	6400	26300	84	2100	2.2
60	2900	1.75	24.55	"	"	7000	27700	72	2450	2.1
54	3250	1.6	27.29	"	"	7000	28400	65	2700	1.95
46	3800	1.35	31.84	"	"	7700	30000	56	3150	1.65
40	4400	1.2	36.88	"	"	7900	31100	48	3650	1.4
34	5100	1.0	43.02	"	"	8700	32800	41	4300	1.2
31	5600	0.93	47.82	"	"	9100	34000	37	4750	1.1
89	1980	2.7	16.49	BF80-../D16XA4	416	11400	41400	107	1650	3.2
63	2800	2.3	23.29	"	"	11800	44900	76	2300	2.7
48.5	3600	2.0	30.21	"	"	12300	47900	59	2950	2.4
43.5	4050	1.9	33.61	"	"	11700	48400	53	3300	2.4
38.5	4550	1.75	38.14	"	"	12200	50300	46.5	3750	2.2
31	5600	1.55	47.46	"	"	13400	53700	37.5	4700	1.85
27.5	6400	1.4	53.86	"	"	14000	55800	33	5300	1.7
24	7300	1.25	61.55	"	"	14800	58100	29	6000	1.55
21	8400	1.15	69.86	"	"	15900	60600	25.5	6900	1.4
18	9800	0.97	83.16	"	"	18400	65100	21.5	8200	1.15
15.5	11300	0.84	94.38	"	"	20300	68500	19	9200	1.05
31.5	5600	2.5	46.43	BF90-../D16XA4	664	13800	65500	38	4600	3.1
28.5	6100	2.4	51.70	"	"	14600	67800	34.5	5100	2.8
23	7600	2.0	63.49	"	"	15800	72000	28	6300	2.4
21	8400	1.9	70.69	"	"	16800	74700	25	7000	2.3
18.5	9500	1.75	80.85	"	"	17500	77500	22	8000	2.1
16.5	10700	1.55	90.02	"	"	18900	80600	20	8800	1.9
14	12600	1.35	107.5	"	"	22300	86900	16.5	10700	1.55
12.5	14100	1.2	119.7	"	"	24500	90800	15	11700	1.45
10.5	16800	1.0	139.1	"	"	27700	96300	13	13500	1.25
9.5	18500	0.91	154.8	"	"	30100	100800	11.5	15300	1.1

P = 22 kW

142	1470	1.7	10.32	BF70-../D18LA4	377	4600	18700	171	1220	2.1
122	1720	1.7	12.04	"	"	4900	19700	147	1420	2.1
98	2100	1.75	14.90	"	"	5900	24000	119	1760	2.1
84	2500	1.7	17.39	"	"	6200	25000	102	2050	2.1
70	3000	1.55	21.04	"	"	6400	26300	84	2500	1.85
60	3500	1.45	24.55	"	"	7000	27700	72	2900	1.75
54	3850	1.35	27.29	"	"	7000	28400	65	3200	1.65
46	4550	1.15	31.84	"	"	7700	30000	56	3750	1.4
40	5200	1.0	36.88	"	"	7900	31100	48	4350	1.2
34	6100	0.85	43.02	"	"	8700	32800	41	5100	1.0

P = 22 kW



Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
128	1640	2.2	11.42	BF80-../D18LA4	473	8900	32200	155	1350	2.7
89	2350	2.3	16.49	"	"	11400	41400	107	1960	2.7
63	3300	1.9	23.29	"	"	11800	44900	76	2750	2.3
48.5	4300	1.65	30.21	"	"	12300	47900	59	3550	2.0
43.5	4800	1.6	33.61	"	"	11700	48400	53	3950	1.95
38.5	5400	1.5	38.14	"	"	12200	50300	46.5	4500	1.8
31	6700	1.3	47.46	"	"	13400	53700	37.5	5600	1.55
27.5	7600	1.2	53.86	"	"	14000	55800	33	6300	1.4
24	8700	1.05	61.55	"	"	14800	58100	29	7200	1.3
21	10000	0.95	69.86	"	"	15900	60600	25.5	8200	1.15
18	11600	0.82	83.16	"	"	18400	65100	21.5	9700	0.98
61	3400	3.3	23.95	BF90-../D18LA4	725	11100	54300	74	2800	4.0
43.5	4800	2.7	33.71	"	"	11900	59300	53	3950	3.3
39	5300	2.5	37.54	"	"	12700	61500	47	4450	3.0
31.5	6600	2.1	46.43	"	"	13800	65500	38	5500	2.6
28.5	7300	2.0	51.70	"	"	14600	67800	34.5	6000	2.4
23	9100	1.7	63.49	"	"	15800	72000	28	7500	2.1
21	10000	1.6	70.69	"	"	16800	74700	25	8400	1.9
18.5	11300	1.45	80.85	"	"	17500	77500	22	9500	1.75
16.5	12700	1.3	90.02	"	"	18900	80600	20	10500	1.6
14	15000	1.1	107.5	"	"	22300	86900	16.5	12700	1.3
12.5	16800	1.0	119.7	"	"	24500	90800	15	14000	1.2
10.5	20000	0.84	139.1	"	"	27700	96300	13	16100	1.05


P = 30 kW

142	2000	1.25	10.32	BF70-../D18XA4	395	4600	18700	171	1670	1.5
122	2300	1.3	12.04	"	"	4900	19700	147	1940	1.5
98	2900	1.25	14.90	"	"	5900	24000	119	2400	1.5
84	3400	1.25	17.39	"	"	6200	25000	102	2800	1.5
70	4050	1.15	21.04	"	"	6400	26300	84	3400	1.35
60	4750	1.05	24.55	"	"	7000	27700	72	3950	1.25
54	5300	0.98	27.29	"	"	7000	28400	65	4400	1.2
46	6200	0.84	31.84	"	"	7700	30000	56	5100	1.0
128	2200	1.65	11.42	BF80-../D18XA4	491	8900	32200	155	1840	2.0
89	3200	1.65	16.49	"	"	11400	41400	107	2650	2.0
63	4500	1.4	23.29	"	"	11800	44900	76	3750	1.7
48.5	5900	1.2	30.21	"	"	12300	47900	59	4850	1.45
43.5	6500	1.2	33.61	"	"	11700	48400	53	5400	1.45
38.5	7400	1.1	38.14	"	"	12200	50300	46.5	6100	1.3
31	9200	0.94	47.46	"	"	13400	53700	37.5	7600	1.15
27.5	10400	0.86	53.86	"	"	14000	55800	33	8600	1.05
118	2400	3.0	12.45	BF90-../D18XA4	743	8000	39700	142	2000	3.6
84	3400	3.0	17.39	"	"	10000	49500	102	2800	3.6
61	4650	2.4	23.95	"	"	11100	54300	74	3850	2.9
43.5	6500	2.0	33.71	"	"	11900	59300	53	5400	2.4
39	7300	1.8	37.54	"	"	12700	61500	47	6000	2.2
31.5	9000	1.55	46.43	"	"	13800	65500	38	7500	1.9
28.5	10000	1.45	51.70	"	"	14600	67800	34.5	8300	1.75
23	12400	1.25	63.49	"	"	15800	72000	28	10200	1.5
21	13600	1.15	70.69	"	"	16800	74700	25	11400	1.4
18.5	15400	1.05	80.85	"	"	17500	77500	22	13000	1.25
16.5	17300	0.97	90.02	"	"	18900	80600	20	14300	1.15
14	20400	0.82	107.5	"	"	22300	86900	16.5	17300	0.97

P = 37 kW

142	2450	1.05	10.32	BF70-...-K/DNF22SB4	604	4600	18700	171	2050	1.25
122	2850	1.05	12.04	"	"	4900	19700	147	2400	1.25
98	3600	1.0	14.90	"	"	5900	24000	119	2950	1.25
84	4200	1.0	17.39	"	"	6200	25000	102	3450	1.25

P = 37 kW



Danfoss

50 Hz			i	Type	m kg	F _{RN} N	F _{RV} N	60 Hz		
n ₂ rpm	M ₂ Nm	f _B						n ₂ rpm	M ₂ Nm	f _B
128	2750	1.35	11.42	BF80-...-K/DNF22SB4	700	8900	32200	155	2250	1.65
89	3950	1.35	16.49	"	"	11400	41400	107	3300	1.6
63	5600	1.15	23.29	"	"	11800	44900	76	4600	1.35
118	2950	2.4	12.45	BF90-...-K/DNF22SB4	958	8000	39700	142	2450	2.9
84	4200	2.4	17.39	"	"	10000	49500	102	3450	2.9
61	5700	1.95	23.95	"	"	11100	54300	74	4750	2.4
43.5	8100	1.6	33.71	"	"	11900	59300	53	6600	1.95
39	9000	1.45	37.54	"	"	12700	61500	47	7500	1.75
31.5	11200	1.25	46.43	"	"	13800	65500	38	9200	1.55
28.5	12300	1.15	51.70	"	"	14600	67800	34.5	10200	1.4
23	15300	1.0	63.49	"	"	15800	72000	28	12600	1.2

P = 45 kW

128	3350	1.1	11.42	BF80-...-K/DNF22MB4	730	8900	32200	155	2750	1.35
89	4800	1.1	16.49	"	"	11400	41400	107	4000	1.35
118	3600	2.0	12.45	BF90-...-K/DNF22MB4	988	8000	39700	142	3000	2.4
84	5100	2.0	17.39	"	"	10000	49500	102	4200	2.4
61	7000	1.6	23.95	"	"	11100	54300	74	5800	1.95
43.5	9800	1.3	33.71	"	"	11900	59300	53	8100	1.6
39	11000	1.2	37.54	"	"	12700	61500	47	9100	1.45
31.5	13600	1.05	46.43	"	"	13800	65500	38	11300	1.25



