
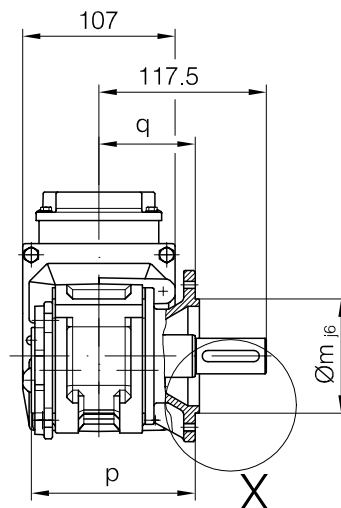




Flansch mit Durchgangslöchern vorne / flange with clearance holes at front /
bride avec trous débouchants à l'avant

Stand: 07.07.2003



Code -3.V/

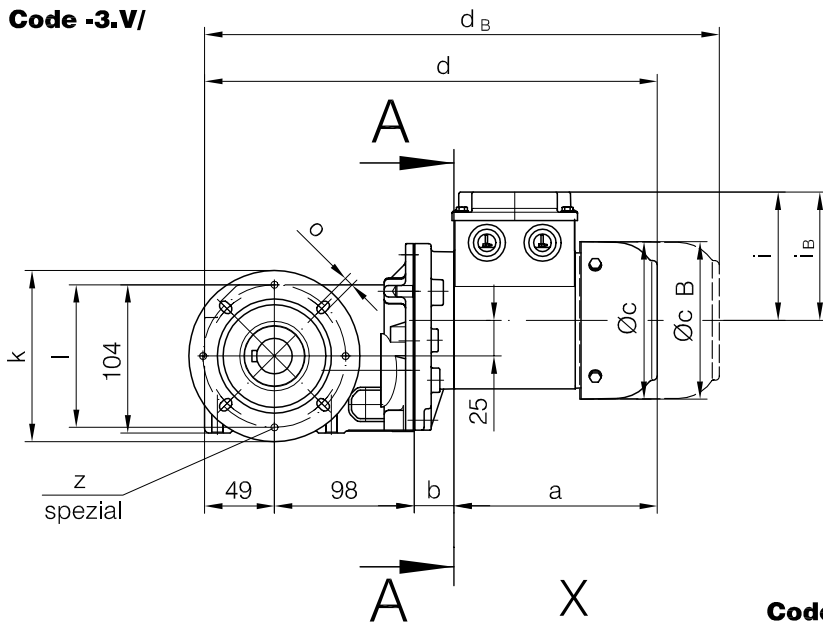


Code -.4/

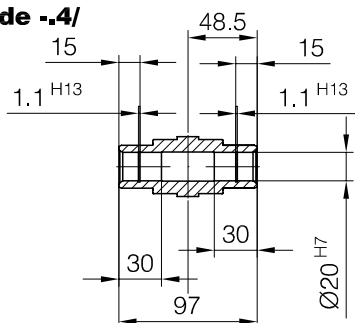


Code -.5/




Code -.1/

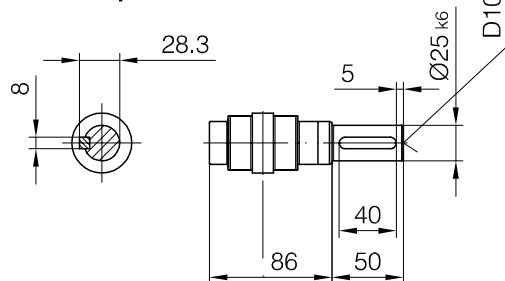

Code -.3/




Code -.7/

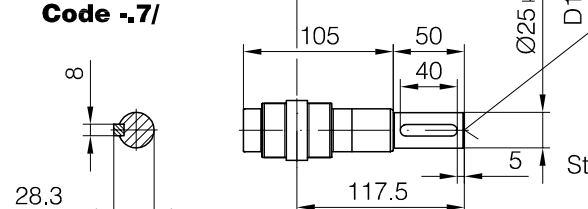

Flanschmaße / Flange dimensions / cotes de la bride

BK06	k	l	m	n	o	p	q	s	t	z
Standard -37V/	Ø120	Ø100	Ø80	8	6.6	115	67.5	3	31	-
Spezial -37V/	Ø120	Ø100	Ø80	8	6.6	115	67.5	3	31	4xM6



Typ / Type / Type	a	b	c	d	i	i _B	Ausführung mit Bremse / with brake / avec frein					
							E003		E004		E008	
							c _B	d _B	c _B	d _B	c _B	d _B
BK06-../D04..	143	28	111	318	90	90	111	361				
BK06-../D05..	170	30	123	348	100	100	123	390				
BK06-../D06..	170	30	123	348	100	100	123	390				
BK06-../D07..	190	30	123	368	100	100	123	410	123	410		
BK06-../D08..	200	74	156	421	115	115					166	508